

Quick Guide **TUNGMEISTER**★ : First choice
☆ : Second choice

Edge shape	Appearance	Appearance	Application	Feature	Edge shape	No. of cutting edges	Tool diameter	Slot width	CRKS	Helix angle	Workpiece material						Page
											P	M	K	N	S	H	
Square	VEH***		Semi-finishing	All round / Variable helix, Variable pitch	Corner radius	4	ø8 - ø20	-	S05 - S12	不等	★	★	★	☆	★	☆	I064
	VEE**-03...		Finishing	All round	Corner radius 0	3	ø8 - ø12	-	S05 - S08	45	★	★	★	☆	★	☆	I064
	VEE**-04..., VED**-04...		Finishing	All round	Corner radius	4	ø6 - ø20	-	S05 - S12	30/45	★	★	★	☆	★	☆	I065
	VEE**-03...		Finishing	For key way / All round	Corner radius	3	ø7.7 - ø19.7	-	S05 - S12	38	★	★	★	☆	★	☆	I065
	VEE**I...		Finishing	All round / Variable pitch	Corner radius / Chamfered	4	ø8 - ø25	-	S05 - S15	38	★	★	★	☆	★	☆	I066
	VEE**R...		Roughing	All round / Serrated cutting edge	Chamfered	4, 5, 6	ø8 - ø25	-	S05 - S15	45	★	★	★	☆	★	☆	I066
	VEE**C...		Semi-finishing	All round / Edge combination	Chamfered	4	ø8 - ø25	-	S05 - S15	45	★	★	★	☆	★	☆	I067
	VEE**A02...		Finishing	All round	Corner radius	2	ø10 - ø12	-	S06 - S08	45			☆	★			I067
	VEE**A03...		Finishing	All round	Corner radius	3	ø8 - ø20	-	S05 - S12	45			☆	★			I068
	VED**-06..., VEE**-06...		Finishing	All round	Corner radius / Chamfered	6	ø8 - ø12	-	S05 - S08	30/45/50	☆	☆	☆		★	★	I068
VED**-08/10..., VEE**-08/10...		Finishing	All round	Corner radius / Chamfered	8, 10	ø16 - ø25	-	S10 - S15	30/50	☆	☆	☆		★	★	I069	
Radius	VRB**-02.../ VRC**-02...		Finishing	All round	Corner radius	2	ø10 - ø20	-	S06 - S12	0/15	★	★	★	☆	★	☆	I069
	VRD**-06...		Finishing	All round	Corner radius	6	ø8 - ø16	-	S05 - S10	30	★	★	★	☆	★	☆	I070
High feed	VFX**-02...		Roughing	All round/ High feed	High feed	2	ø10 - ø20	-	S06 - S12	-	★	★	★	☆	★	★	I072
	VFX**-04...		Roughing	All round/ High feed	High feed	4	ø12, ø16	-	S08, S10	-	★	★	★	☆	★	★	I072
Ball	VBB**-BM...		Roughing	All round	Ball	2	ø8 - ø16	-	S05 - S10	0	★	★	★	☆	★	☆	I073
	VBB**-BG...		Semi-finishing	All round	Ball	2	ø8 - ø16	-	S05 - S10	0	★	★	★	☆	★	☆	I073
	VBD**-BG...		Finishing	All round	Ball	2	ø8 - ø16	-	S05 - S10	30	★	★	★	☆	★	☆	I073
	VBD**-BG.../ VBE**-BG...		Finishing	All round	Ball	4	ø6 - ø25	-	S05 - S15	30/38	★	★	★	☆	★	☆	I074
	VBB**-SG...		Finishing	All round / Sphere	Ball	2	ø10 - ø20	-	S05 - S15	0	★	★	★	☆	★	☆	I074

Quick Guide **TUNGMEISTER**

★ : First choice
☆ : Second choice

Edge shape	Appearance	Appearance	Application	Feature	Edge shape	No. of cutting edges	Tool diameter	Slot width	CRKS	Helix angle	Workpiece material						Page
											P	M	K	N	S	H	
Ball	VBE**-BGA...		Finishing	All round	Ball	2	ø8 - ø20	-	S05 - S12	45			☆	★			1074
Spot drilling and chamfering	VCP**-.02...		Finishing	For chamfering / 30°, 45°, 60°	Chamfered (with center cutting edge)	2	ø8 - ø16.5	-	S05 - S10	0	★	★	★	☆	★	☆	1076
Chamfering	VCA**-.04/06...		Finishing	For chamfering / 45°	Chamfered (without center cutting edge)	4, 6	ø10 - ø20	-	S06 - S12	0	★	★	★	☆	★	☆	1080
	VCW**-.02...		Finishing	For chamfering / with back chamfering edge	Chamfered (with center cutting edge)	2	ø11.8	-	S06	0	★	★	★	☆	★	☆	1080
	VCR**-.02...		Finishing	For chamfering / R chamfering	Chamfered (without center cutting edge)	2	ø8 - ø20	-	S05 - S12	0	★	★	★	☆	★	☆	1080
Spot drilling	VDP**-.02...		Finishing	For Spot drilling	Holemaking	2	ø3.28 - ø6.46	-	S05 - S10	0	★	★	★	☆	★	☆	1076
Counter-boring	VGC**-.02...		Finishing	For Counterboring	Corner radius	2	ø7.8 - ø16	-	S05 - S10	10	★	★	★	☆	★	☆	1078
Threading	VST**-.3...		Finishing	For slotting	Corner radius	3	ø15.7 - ø17.7	1.2-3.17	S06	0	★	★	★	☆	★	☆	1082
	VST**-.4/6...		Finishing	For slotting	Corner radius	4, 6	ø21.7 - ø27.7	0.76-10	S08, S10	0	★	★	★	☆	☆	☆	1083
	VTB**-.06...		Finishing	For slotting	Corner radius	6	ø13.5 - ø25	2-8	S05 - S10	0	★	★	★	☆	★	☆	1084
	VTB** C15-06...		Finishing	For slotting	Chamfered	6	ø13.5	2	S05	0	★	★	★	☆	★	☆	1084
Chamfering	VST**A45...		Finishing	For chamfering / 45°	Chamfered	3, 4	ø17.7 - ø21.7	3.4-5.5	S06, S08	0	★	★	★	☆	★	☆	1083
Threading	VMT***IS / UN / W		Finishing	Threading	Full profile	3~6	ø10 - ø16	-	S05, S06 S08	-	★	★	★	☆	★	☆	I116 - I117
Threading	VTR***IS / W		Finishing	Threading	Partial profile	3, 4	ø15.7 - ø21.7	-	S06, S08	-	★	★	★	☆	★	☆	I117

Grade
Insert
Ext. Toolholder
Int. Toolholder
Threading
Grooving
Miniature tool
Milling cutter
Endmill
Drilling tool
Tooling System
User's Guide
Index



Choose the best head-shank combination **for more efficiency!**
Minimize setup time while **maximizing productivity!**



1 Wide range of cutting heads

23 kinds of cutting heads are available. The head exchange is easy and highly accurate with the precision thread.

Flexible combinations

TungMeister can be applied to all kinds of endmill machining applications.

2 Three kinds of shank material

Users can choose the most suitable combination according to the machining parameters, length and rigidity required.



ER collet



Adaptor for TungFlex



Straight shank & neck



Straight shank & taper neck



Straight shank & neck (carbide)



Straight (for grooving)

Steel: For general purpose
Carbide: For highly accurate machining due to excellent rigidity
Tungsten: Reduced chattering due to high vibration damping capacity

Reduces tool changeover times drastically!!



- Machine downtime is decreased considerably.
- Enables users to only change cutting head, simplifying set-ups.

Increases productivity by 90%



Highly accurate repeatability

- Accuracy can be maintained by touching the taper and face.
- Repeatability is guaranteed and is not a concern for machine operators.

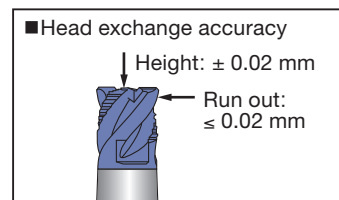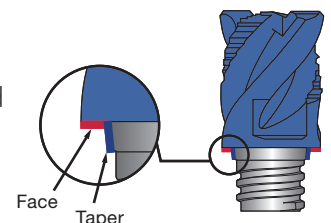



V **SS** **D10** **L070** **S** **06** - **W** - **A**

1 2 3 4 5 6 7 8

Shank

1 Series	
V	TungMeister

2 Shank type	
SS	Straight neck
TS	Taper neck
SC	Slotting
ST	for T-Slotting
AD	TungFlex adapter
ER	ER collet holder

3 Shank diameter (mm)	
D08	ø8
D10	ø10
D12	ø12
D16	ø16
D20	ø20
D25	ø25
D32	ø32
VSC, VAD type	
100	ø10
120	ø12
130	ø13
180	ø18
210	ø21
VER type	
11	Collet size
16	Collet size

4 Length (mm)	
L070	70

5 Shape of shank	
S	Cylindrical
W	Weldon

6 Connection screw size	
05	S05
06	S06
08	S08
10	S10
12	S12
15	S15

7 Shank material	
S	Steel
C	Carbide
W	Tungsten

8 Additional feature	
A	with coolant hole
M	Thread size (TungFlex adapters)

Head

- Square endmill

V **EE** **080** **L05.0** **R00** - **03** **S05**

1 2 3 4 5 6 7 8 9

- Ball nose endmill

V **BD** **200** **L15.0** - **BG** - **04** **S12**

1 2 3 4 5 6 7 8 9

1 Series	
V	TungMeister

2 Cutting edge	
E	Square
B	Ball nose
R	Radius
FX	for high feed
CA	for chamfering
CP	Spot drilling
CW	for chamfering (front and back)
CR	for R chamfering
GC	for counter boring
DP	for center drilling
S	for slotting
T	for T-slot milling
MT	Threading (full profile)
TR	Threading (partial profile)

3 Helix angle / Rake face	
B	0°
C	15°
D	30°
E	38° - 50°
F	60°
T	Land
H	Variable helix

4 Diameter (mm)	
060	ø6
200	ø20

5 Cutting edge length (mm)	
Length	
L07.0	7
L15.0	15
Groove width	
W1.50	1.5
W1.57	1.57
W10.0	10

6 Corner shape / Angle	
Nose radius	
R00	Sharp edge
R005	R0.05
R01	R0.1
R05	R0.5
R10	R1.0
Chamfer type	
C15	0.15 x 45°
C30	0.3 x 45°
C60	0.6 x 45°
Chamfering head	
A30	30°
A60	60°
R chamfering head	
R10	R1.0
R16	R1.6
Ball nose	
SG	Sphere / high precision
BM	Ball / general purpose
BG	Ball / high precision
Threading	
IS**	ISO metric, pitch**
UN**	Unified, **TPI
W**	Whitworth, pitch**

7 Additional feature	
I	Variable pitch
A	for aluminium
R	for roughing
C	Roughing + finishing


8 The number of flutes	
General purpose	
02	2
06	6
Grooving head VST type	
03	3
04	4

9 Connection screw size	
S05	S05
S06	S06
S08	S08
S10	S10
S12	S12
S15	S15

TUNGMEISTER

VEH...

4 flute square head, for general purpose (TungMeister)

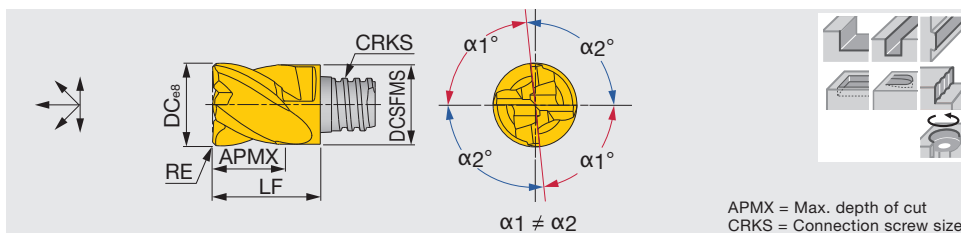

Designation	AH725	NOF	FHA	DC	DCSFMS	APMX	RE	CRKS	LF	Wrench	Torque*
VEH080L05.0R05I04S05	●	4	35 - 39	8	7.7	5	0.5	S05	10	KEYV-S05	7
VEH080L05.0R10I04S05	●	4	35 - 39	8	7.7	5	1	S05	10	KEYV-S05	7
VEH100L07.0R05I04S06	●	4	35 - 39	10	9.7	7	0.5	S06	13	KEYV-S06	10
VEH100L07.0R10I04S06	●	4	35 - 39	10	9.7	7	1	S06	13	KEYV-S06	10
VEH120L09.0R05I04S08	●	4	35 - 39	12	11.7	9	0.5	S08	16.5	KEYV-S08	15
VEH120L09.0R10I04S08	●	4	35 - 39	12	11.7	9	1	S08	16.5	KEYV-S08	15
VEH160L12.0R05I04S10	●	4	35 - 39	16	15.3	12	0.5	S10	20.5	KEYV-S10	28
VEH160L12.0R10I04S10	●	4	35 - 39	16	15.3	12	1	S10	20.5	KEYV-S10	28
VEH200L15.0R05I04S12	●	4	35 - 39	20	18.3	15	0.5	S12	25.5	KEYV-S12	28
VEH200L15.0R10I04S12	●	4	35 - 39	20	18.3	15	1	S12	25.5	KEYV-S12	28


* Recommended clamping torque (N·m)
2 pieces per package

●: Line up

TUNGMEISTER

VEE**-03...

4 flute square head, for general purpose (TungMeister)

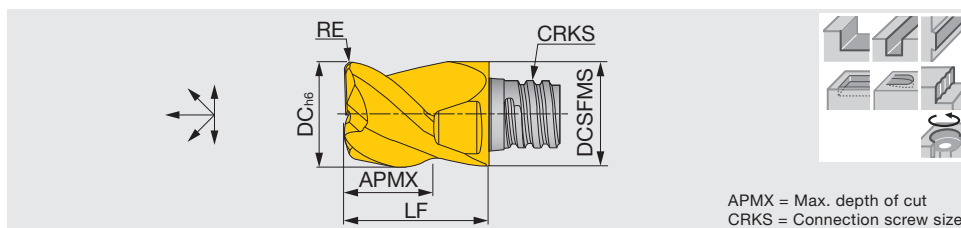


Designation	AH725	NOF	FHA	DC	DCSFMS	APMX	CRKS	LF	Wrench	Torque*
VEE080L05.0R00-03S05	●	3	45°	8	7.7	5	S05	10	KEYV-S05	7
VEE100L07.0R00-03S06	●	3	45°	10	9.7	7	S06	13	KEYV-S06	10
VEE120L09.0R00-03S08	●	3	45°	12	11.7	9	S08	16.5	KEYV-S08	15

* Recommended clamping torque (N · m)
2 pieces per package

●: Line up

4 flute square head, for general purpose (TungMeister)

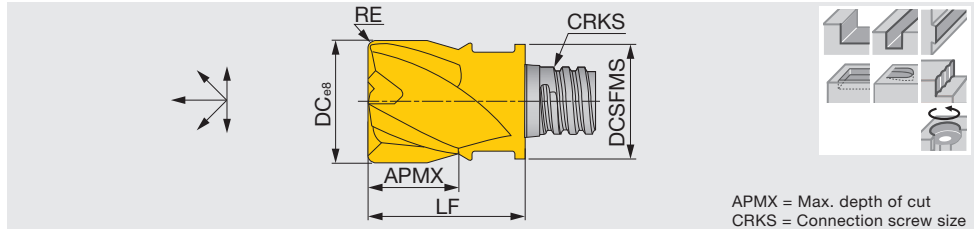


APMX = Max. depth of cut
CRKS = Connection screw size

Designation	AH725	NOF	FHA	DC	DCSFMS	APMX	RE	CRKS	LF	Wrench	Torque*
VEE060L05.0R00-04S05	●	4	45°	6	8	5	-	S05	10	KEYV-S05	7
VEE080L05.0R00-04S05	●	4	45°	8	7.7	5	-	S05	10	KEYV-S05	7
VED080L05.0R05-04S05	●	4	30°	8	7.7	5	0.5	S05	10	KEYV-S05	7
VED080L05.0R10-04S05	●	4	30°	8	7.7	5	1	S05	10	KEYV-S05	7
VED080L05.0R15-04S05	●	4	30°	8	7.7	5	1.5	S05	10	KEYV-S05	7
VEE100L07.0R00-04S06	●	4	45°	10	9.7	7	-	S06	13	KEYV-S06	10
VED100L07.0R05-04S06	●	4	30°	10	9.7	7	0.5	S06	13	KEYV-S06	10
VEE100L07.0R05-04S06	●	4	45°	10	9.7	7	0.5	S06	13	KEYV-S06	10
VED100L07.0R10-04S06	●	4	30°	10	9.7	7	1	S06	13	KEYV-S06	10
VEE100L07.0R10-04S06	●	4	45°	10	9.7	7	1	S06	13	KEYV-S06	10
VEE120L09.0R00-04S08	●	4	45°	12	11.7	9	-	S08	16.5	KEYV-S08	15
VED120L09.0R05-04S08	●	4	30°	12	11.7	9	0.5	S08	16.5	KEYV-S08	15
VEE120L09.0R05-04S08	●	4	45°	12	11.7	9	0.5	S08	16.5	KEYV-S08	15
VED120L09.0R10-04S08	●	4	30°	12	11.7	9	1	S08	16.5	KEYV-S08	15
VEE120L09.0R10-04S08	●	4	45°	12	11.7	9	1	S08	16.5	KEYV-S08	15
VEE160L12.0R00-04S10	●	4	45°	16	15.3	12	-	S10	20.5	KEYV-S10	28
VED160L12.0R05-04S10	●	4	30°	16	15.3	12	0.5	S10	20.5	KEYV-S10	28
VEE160L12.0R05-04S10	●	4	45°	16	15.3	12	0.5	S10	20.5	KEYV-S10	28
VED160L12.0R10-04S10	●	4	30°	16	15.3	12	1	S10	20.5	KEYV-S10	28
VEE160L12.0R10-04S10	●	4	45°	16	15.3	12	1	S10	20.5	KEYV-S10	28
VED160L12.0R15-04S10	●	4	30°	16	15.3	12	1.5	S10	20.5	KEYV-S10	28
VEE160L12.0R15-04S10	●	4	45°	16	15.3	12	1.5	S10	20.5	KEYV-S10	28
VED160L12.0R20-04S10	●	4	30°	16	15.3	12	2	S10	20.5	KEYV-S10	28
VEE160L12.0R20-04S10	●	4	45°	16	15.3	12	2	S10	20.5	KEYV-S10	28
VED160L12.0R30-04S10	●	4	30°	16	15.3	12	3	S10	20.5	KEYV-S10	28
VEE160L12.0R30-04S10	●	4	45°	16	15.3	12	3	S10	20.5	KEYV-S10	28
VED160L12.0R40-04S10	●	4	30°	16	15.3	12	4	S10	20.5	KEYV-S10	28
VEE160L12.0R40-04S10	●	4	45°	16	15.3	12	4	S10	20.5	KEYV-S10	28
VEE200L15.0R00-04S12	●	4	45°	20	18.3	15	-	S12	25.5	KEYV-S12	28
VED200L15.0R05-04S12	●	4	30°	20	18.3	15	0.5	S12	25.5	KEYV-S12	28
VEE200L15.0R10-04S12	●	4	30°	20	18.3	15	1	S12	25.5	KEYV-S12	28
VED200L15.0R20-04S12	●	4	30°	20	18.3	15	2	S12	25.5	KEYV-S12	28
VEE200L15.0R30-04S12	●	4	30°	20	18.3	15	3	S12	25.5	KEYV-S12	28

* Recommended clamping torque (N·m)
2 pieces per package

●: Line up

3 flute square head, for key way (TungMeister)

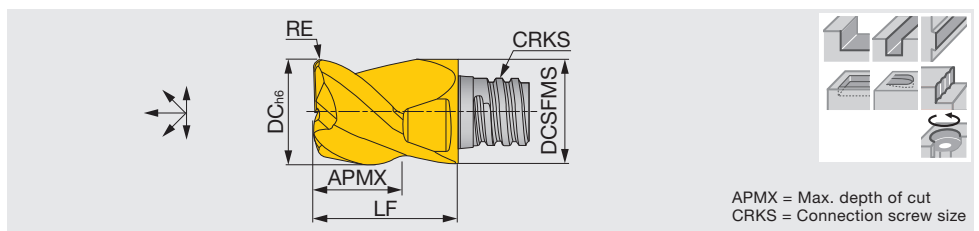

APMX = Max. depth of cut
CRKS = Connection screw size


Designation	AH725	NOF	FHA	DC	DCSFMS	APMX	RE	CRKS	LF	Wrench	Torque*
VEE077L04.0R02-03S05	●	3	38°	7.7	7.7	4	0.2	S05	10	KEYV-S05	7
VEE097L05.0R03-03S06	●	3	38°	9.7	9.7	5	0.3	S06	13	KEYV-S06	10
VEE117L07.0R03-03S08	●	3	38°	11.7	11.7	7	0.3	S08	16.5	KEYV-S08	15
VEE157L08.0R03-03S10	●	3	38°	15.7	15.3	8	0.3	S10	20.5	KEYV-S10	28
VEE197L12.0R04-03S12	●	3	38°	19.7	18.3	12	0.4	S12	25.5	KEYV-S12	28

* Recommended clamping torque(N · m)
2 pieces per package

●: Line up

Reference pages: Standard cutting conditions → I070 - I071

4 flute square head, variable pitch, for chatter dampening (TungMeister)

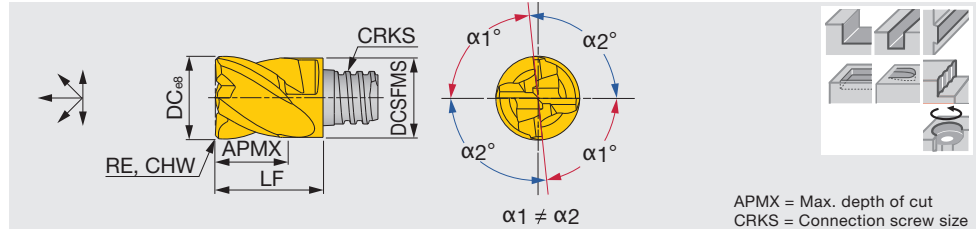


Designation	AH725	NOF	FHA	DC	DCSFMS	APMX	RE	CHW	CRKS	LF	Wrench	Torque*
VEE080L05.0C30I04S05	●	4	38°	8	7.7	5	-	0.3	S05	10	KEYV-S05	7
VEE100L07.0C40I04S06	●	4	38°	10	9.7	7	-	0.4	S06	13	KEYV-S06	10
VEE120L09.0C50I04S08	●	4	38°	12	11.7	9	-	0.5	S08	16.5	KEYV-S08	15
VEE160L12.0C60I04S10	●	4	38°	16	15.3	12	-	0.6	S10	20.5	KEYV-S10	28
VEE200L15.0C60I04S12	●	4	38°	20	18.3	15	-	0.6	S12	25.5	KEYV-S12	28
VEE250L22.0C60I04S15	●	4	38°	25	23.9	22	-	0.6	S15	37	KEYV-W20	40
VEE250L22.0R00I04S15	●	4	38°	25	23.9	22	-	-	S15	37	KEYV-W20	40
VEE250L22.0R05I04S15	●	4	38°	25	23.9	22	0.5	-	S15	37	KEYV-W20	40
VEE250L22.0R10I04S15	●	4	38°	25	23.9	22	1	-	S15	37	KEYV-W20	40
VEE250L22.0R20I04S15	●	4	38°	25	23.9	22	2	-	S15	37	KEYV-W20	40
VEE250L22.0R30I04S15	●	4	38°	25	23.9	22	3	-	S15	37	KEYV-W20	40

* Recommended clamping torque(N · m)
VEE080 - VEE200: 2 pieces per package
VEE250: 1 piece per package

●: Line up

4 flute square head, variable pitch, for chatter dampening (TungMeister)

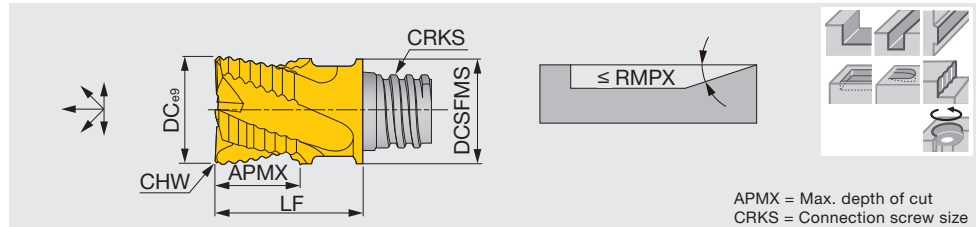


Designation	AH725	NOF	FHA	DC	DCSFMS	APMX	CHW	CRKS	LF	RMPX	Wrench	Torque*
VEE080L05.0C25R04S05	●	4	45°	8	7.7	5	0.25	S05	10	90°	KEYV-S05	7
VEE100L07.0C30R04S06	●	4	45°	10	9.7	7	0.3	S06	13	90°	KEYV-S06	10
VEE120L09.0C35R04S08	●	4	45°	12	11.7	9	0.35	S08	16.5	90°	KEYV-S08	15
VEE160L12.0C40R05S10	●	5	45°	16	15.3	12	0.4	S10	20.5	7°	KEYV-S10	28
VEE200L15.0C40R06S12	●	6	45°	20	18.3	15	0.4	S12	25.5	3°	KEYV-S12	28
VEE250L22.0C50R06S15	●	6	45°	25	23.9	22	0.5	S15	37	3°	KEYV-W20	40

* Recommended clamping torque (N · m)
VEE080 - VEE200: 2 pieces per package
VEE250: 1 piece per package

●: Line up

Square head, roughing and finishing combination type (TungMeister)

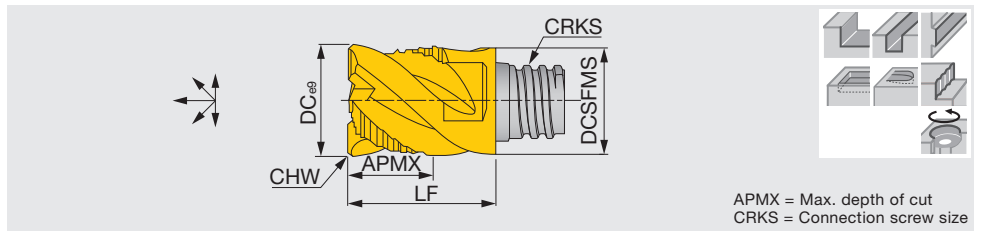


Designation	AH725	NOF	FHA	DC	DCSFMS	APMX	CHW	CRKS	LF	Wrench	Torque*
VEE080L05.0C30C04S05	●	4	45°	8	7.7	5	0.3	S05	10	KEYV-S05	7
VEE100L07.0C30C04S06	●	4	45°	10	9.7	7	0.3	S06	13	KEYV-S06	10
VEE120L09.0C40C04S08	●	4	45°	12	11.7	9	0.4	S08	16.5	KEYV-S08	15
VEE160L12.0C60C04S10	●	4	45°	16	15.3	12	0.6	S10	20.5	KEYV-S10	28
VEE200L15.0C60C04S12	●	4	45°	20	18.3	15	0.6	S12	25.5	KEYV-S12	28
VEE250L22.0C60C04S15	●	4	45°	25	23.9	22	0.6	S15	37	KEYV-W20	40

* Recommended clamping torque(N · m)
VEE080 ~ VEE200: 2 pieces per package
VEE250: 1 piece per package

●: Line up

2 flute square head, for aluminium machining (TungMeister)

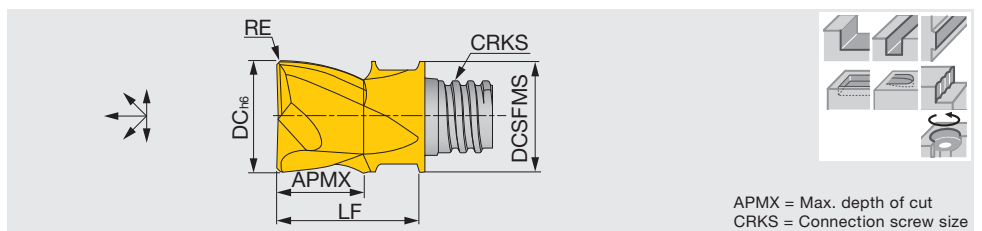

Designation	KS15F	NOF	FHA	DC	DCSFMS	APMX	RE	CRKS	LF	Wrench	Torque*
VEE100L07.0R05A02S06	●	2	45°	10	9.7	7	0.5	S06	13	KEYV-S06	10
VEE100L07.0R10A02S06	●	2	45°	10	9.7	7	1	S06	13	KEYV-S06	10
VEE120L09.0R05A02S08	●	2	45°	12	11.7	9	0.5	S08	16.5	KEYV-S08	15


* Recommended clamping torque(N·m)
2 pieces per package

●: Line up

TUNGMEISTER

VEE**A03...

3 flute square head, for aluminium machining (TungMeister)

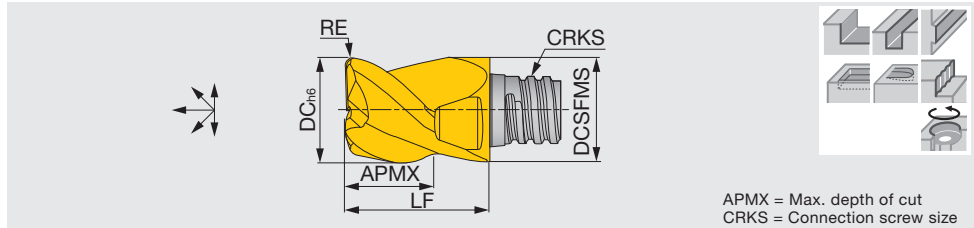

APMX = Max. depth of cut
CRKS = Connection screw size

Designation	KS15F	NOF	FHA	DC	DCSFMS	APMX	RE	CRKS	LF	Wrench	Torque*
VEE080L05.0R05A03S05	●	3	45°	8	7.7	5	0.5	S05	10	KEYV-S05	7
VEE100L06.0R05A03S06	●	3	45°	10	9.7	6	0.5	S06	13	KEYV-S06	10
VEE100L06.0R10A03S06	●	3	45°	10	9.7	6	1	S06	13	KEYV-S06	10
VEE120L08.0R05A03S08	●	3	45°	12	11.7	8	0.5	S08	16.5	KEYV-S08	15
VEE120L08.0R10A03S08	●	3	45°	12	11.7	8	1	S08	16.5	KEYV-S08	15
VEE160L10.0R00A03S10	●	3	45°	16	15.3	10	-	S10	20.5	KEYV-S10	28
VEE160L10.0R10A03S10	●	3	45°	16	15.3	10	1	S10	20.5	KEYV-S10	28
VEE160L10.0R20A03S10	●	3	45°	16	15.3	10	2	S10	20.5	KEYV-S10	28
VEE200L12.0R05A03S12	●	3	45°	20	18.3	12	0.5	S12	25.5	KEYV-S12	28
VEE200L12.0R10A03S12	●	3	45°	20	18.3	12	1	S12	25.5	KEYV-S12	28
VEE200L12.0R20A03S12	●	3	45°	20	18.3	12	2	S12	25.5	KEYV-S12	28


* Recommended clamping torque(N·m)
2 pieces per package

●: Line up

TUNGMEISTER

VED**-06..., VEE**-06...

6 flute square head, for difficult-to-cut material (TungMeister)

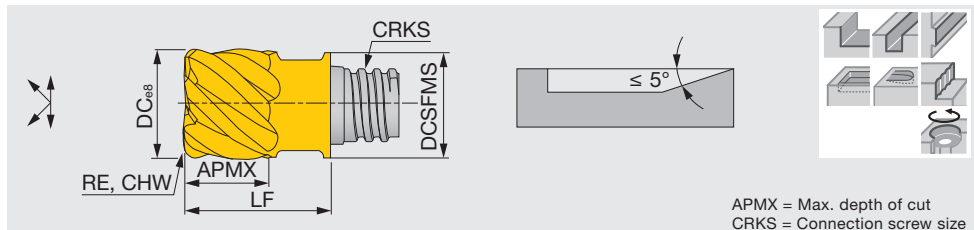

APMX = Max. depth of cut
CRKS = Connection screw size


Designation	AH725	AH750	NOF	FHA	DC	DCSFMS	APMX	RE	CHW	CRKS	LF	Wrench	Torque*
VEE080L05.0R05-06S05	●		6	45°	8	7.7	5	0.5	-	S05	10	KEYV-S05	7
VEE080L05.0R10-06S05	●		6	45°	8	7.7	5	1	-	S05	10	KEYV-S05	7
VEE080L05.0R15-06S05	●		6	45°	8	7.7	5	1.5	-	S05	10	KEYV-S05	7
VEE080L05.0C10-06S05		●	6	50°	8	7.7	5	-	0.1	S05	10	KEYV-S05	7
VEE100L07.0R00-06S06	●		6	45°	10	9.7	7	-	-	S06	13	KEYV-S06	10
VED100L07.0R05-06S06	●		6	30°	10	9.7	7	0.5	-	S06	13	KEYV-S06	10
VEE100L07.0R05-06S06	●		6	45°	10	9.7	7	0.5	-	S06	13	KEYV-S06	10
VED100L07.0R10-06S06	●		6	30°	10	9.7	7	1	-	S06	13	KEYV-S06	10
VEE100L07.0R10-06S06	●		6	45°	10	9.7	7	1	-	S06	13	KEYV-S06	10
VED100L07.0R15-06S06	●		6	30°	10	9.7	7	1.5	-	S06	13	KEYV-S06	10
VEE100L07.0R15-06S06	●		6	45°	10	9.7	7	1.5	-	S06	13	KEYV-S06	10
VEE100L07.0C10-06S06		●	6	50°	10	9.7	7	-	0.1	S06	13	KEYV-S06	10
VEE120L09.0R00-06S08	●		6	45°	12	11.7	9	-	-	S08	16.5	KEYV-S08	15
VED120L09.0R05-06S08	●		6	30°	12	11.7	9	0.5	-	S08	16.5	KEYV-S08	15
VED120L09.0R10-06S08	●		6	30°	12	11.7	9	1	-	S08	16.5	KEYV-S08	15
VEE120L09.0R10-06S08	●		6	45°	12	11.7	9	1	-	S08	16.5	KEYV-S08	15
VEE120L09.0R15-06S08	●		6	45°	12	11.7	9	1.5	-	S08	16.5	KEYV-S08	15
VEE120L09.0C10-06S08		●	6	50°	12	11.7	9	-	0.1	S08	16.5	KEYV-S08	15

* Recommended clamping torque(N·m)
2 pieces per package

●: Line up

Reference pages: Standard cutting conditions → [I070](#) - [I071](#)

8-10 flute square head, for difficult-to-cut material (TungMeister)

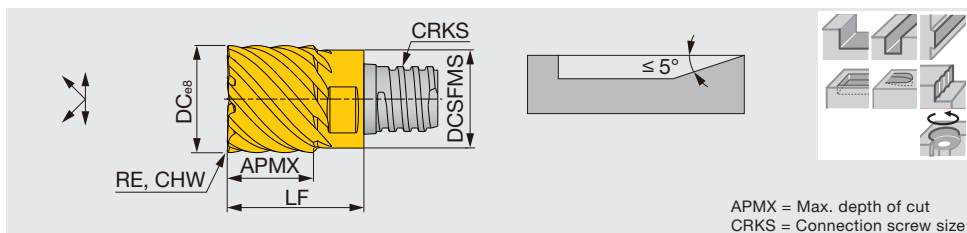


Designation	AH725	AH750	NOF	FHA	DC	DCSFMS	APMX	RE	CHW	CRKS	LF	Wrench	Torque*
VED160L12.0R05-08S10	●		8	30°	16	15.3	12	0.5	-	S10	20.5	KEYV-S10	28
VED160L12.0R10-08S10	●		8	30°	16	15.3	12	1	-	S10	20.5	KEYV-S10	28
VED160L12.0R16-08S10	●		8	30°	16	15.3	12	1.6	-	S10	20.5	KEYV-S10	28
VED160L12.0R20-08S10	●		8	30°	16	15.3	12	2	-	S10	20.5	KEYV-S10	28
VEE160L12.0C20-08S10		●	8	50°	16	15.3	12	-	0.2	S10	20.5	KEYV-S10	28
VED200L15.0R10-10S12	●		10	30°	20	18.3	15	1	-	S12	25.5	KEYV-S12	28
VED200L15.0R20-10S12	●		10	30°	20	18.3	15	2	-	S12	25.5	KEYV-S12	28
VEE200L15.0C20-10S12		●	10	50°	20	18.3	15	-	0.2	S12	25.5	KEYV-S12	28
VED250L22.0R10-10S15	●		10	30°	25	23.9	22	1	-	S15	37	KEYV-W20	40
VED250L22.0R20-10S15	●		10	30°	25	23.9	22	2	-	S15	37	KEYV-W20	40

* Recommended clamping torque(N·m)
VED/VEE160 - VED/VEE200: 2 pieces per package
VED250: 1 piece per package

●: Line up

2 flute radius head (TungMeister)

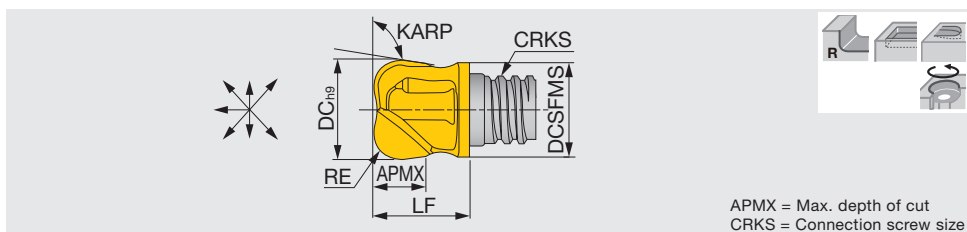

Designation	AH725	NOF	FHA	DC	DCSFMS	APMX	RE	KARP	CRKS	LF	Wrench	Torque*
VRC100L07.0R05-02S06	●	2	15°	10	9.5	7	0.5	95°	S06	12.4	KEYV-S06	10
VRC100L07.0R10-02S06	●	2	15°	10	9.5	7	1	95°	S06	12.4	KEYV-S06	10
VRB100L06.0R20-02S06	●	2	0°	10	9.2	6	2	97°	S06	12.4	KEYV-S06	10
VRB120L05.7R30-02S06	●	2	0°	12	9.5	5.7	3	97°	S06	9.1	**KEYV-S08	10
VRB120L05.4R40-02S06	●	2	0°	12	9.5	5.4	4	97°	S06	9.1	**KEYV-S08	10
VRB120L06.3R16-02S08	●	2	0°	12	11.5	5.9	1.6	97°	S08	11.1	KEYV-S08	15
VRB120L06.2R20-02S08	●	2	0°	12	11.5	6.2	2	97°	S08	11.1	KEYV-S08	15
VRB120L06.1R25-02S08	●	2	0°	12	11.5	5.8	2.5	97°	S08	11.1	KEYV-S08	15
VRB120L06.1R30-02S08	●	2	0°	12	11.5	5.7	3	97°	S08	11.1	KEYV-S08	15
VRB120L05.9R40-02S08	●	2	0°	12	11.5	5.5	4	97°	S08	11.1	KEYV-S08	15
VRB160L08.0R50-02S10	●	2	0°	16	15.2	8	5	97°	S10	20.2	KEYV-S10	28
VRB200L11.1R30-02S12	●	2	0°	20	18.3	11	3	97°	S12	17	KEYV-S12	28
VRB200L11.5R40-02S12	●	2	0°	20	18.3	11.3	4	97°	S12	17.3	KEYV-S12	28
VRB200L11.5R50-02S12	●	2	0°	20	18.3	11.3	5	97°	S12	17.3	KEYV-S12	28
VRB200L11.4R60-02S12	●	2	0°	20	18.3	11.2	6	97°	S12	17.3	KEYV-S12	28
VRB200L11.3R80-02S12	●	2	0°	20	18.3	11.1	8	97°	S12	17.3	KEYV-S12	28

Note: Suitable for contouring operation.


** The wrench size for these heads is different from the ones for the other head types.

* Recommended clamping torque(N·m)
2 pieces per package

●: Line up



Radius head with 6 ground flutes (TungMeister)

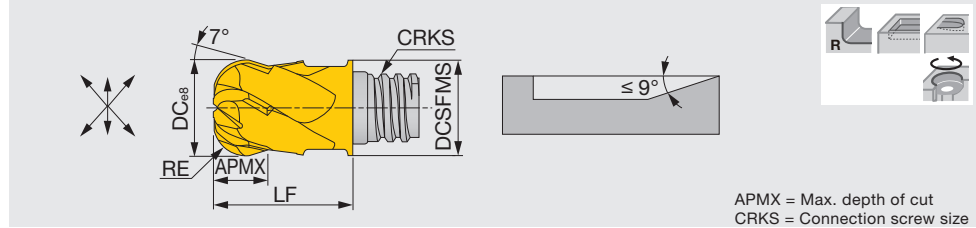

APMX = Max. depth of cut
CRKS = Connection screw size

Designation	AH725	NOF	FHA	DC	DCSFMS	APMX	RE	CRKS	LF	Wrench	Torque*
VRD080L04.0R20-06S05	●	6	30°	8	7.7	4	2	S05	10	KEYV-S05	7
VRD100L05.0R30-06S06	●	6	30°	10	9.7	5	3	S06	13	KEYV-S06	10
VRD120L07.0R40-06S08	●	6	30°	12	11.7	7	4	S08	16.5	KEYV-S08	15
VRD160L09.0R50-06S10	●	6	30°	16	15.3	9	5	S10	20.5	KEYV-S10	28

●: Line up

* Recommended clamping torque(N·m)
2 pieces per package

Square

R

Radius

Ball

chamfering

Slotting

Others

2

3

4

5

6 or more

STANDARD CUTTING CONDITIONS

Shoulder milling (VEH, VEE: 3 flutes, VED/VEE: 4 flutes, VEE-A, VEE-I, VEE-R, VEE-C, VRB, VRC, VRD)

ISO	Workpiece material	Hardness	Cutting speed Vc (m/min)	Feed per tooth: fz (mm/t)							Depth of cut ap (mm)	Pick feed Pf (mm)
				Tool diameter: DC (mm)								
				6	8	10	12	16	20	25		
P	Low carbon steels S45C, S55C, etc. C45, C55, etc.	- 300 HB	80 - 180	0.03 - 0.07	0.05 - 0.09	0.07 - 0.12	0.08 - 0.13	0.09 - 0.15	0.1 - 0.17	0.1 - 0.17	0.6 x DC	0.25 x DC
	High carbon steels SCM440, SCr415, etc. 42CrMo4, 15Cr3, etc.	- 300 HB	60 - 140	0.03 - 0.07	0.05 - 0.09	0.07 - 0.12	0.08 - 0.13	0.09 - 0.15	0.1 - 0.17	0.1 - 0.17	0.6 x DC	0.25 x DC
	Prehardened steel PX5, NAK80, etc.	30 - 40 HRC	60 - 120	0.03 - 0.07	0.05 - 0.09	0.07 - 0.12	0.08 - 0.13	0.09 - 0.15	0.1 - 0.17	0.1 - 0.17	0.6 x DC	0.25 x DC
M	Stainless steels SUS304, SUS316, etc. X5CrNi18-9, X5CrNiMo17-12-2, etc.	- 200 HB	40 - 100	0.03 - 0.07	0.05 - 0.09	0.07 - 0.12	0.08 - 0.13	0.09 - 0.15	0.1 - 0.17	0.1 - 0.17	0.6 x DC	0.25 x DC
K	Grey cast irons FC250, FC300, etc. 250, 300, etc.	150 - 250 HB	80 - 200	0.03 - 0.07	0.05 - 0.09	0.07 - 0.12	0.08 - 0.13	0.09 - 0.15	0.1 - 0.17	0.1 - 0.17	0.6 x DC	0.25 x DC
	Ductile cast irons FCD400, etc. 400-15S, etc.	150 - 250 HB	80 - 200	0.03 - 0.07	0.05 - 0.09	0.07 - 0.12	0.08 - 0.13	0.09 - 0.15	0.1 - 0.17	0.1 - 0.17	0.6 x DC	0.25 x DC
N	Aluminium alloys Si < 13%	-	200 - 700	0.03 - 0.07	0.05 - 0.09	0.07 - 0.12	0.08 - 0.13	0.09 - 0.15	0.1 - 0.17	0.1 - 0.17	0.6 x DC	0.25 x DC
	Aluminium alloys Si ≥ 13%	-	100 - 300	0.03 - 0.07	0.05 - 0.09	0.07 - 0.12	0.08 - 0.13	0.09 - 0.15	0.1 - 0.17	0.1 - 0.17	0.6 x DC	0.25 x DC
S	Titanium alloys Ti-6Al-4V, etc.	-	40 - 80	0.03 - 0.07	0.05 - 0.09	0.07 - 0.12	0.08 - 0.13	0.09 - 0.15	0.1 - 0.17	0.1 - 0.17	0.6 x DC	0.05 x DC
	Heat-resistant alloys Inconel 718, etc.	-	20 - 40	0.03 - 0.07	0.05 - 0.09	0.07 - 0.12	0.08 - 0.13	0.09 - 0.15	0.1 - 0.17	0.1 - 0.17	0.6 x DC	0.05 x DC
H	Hardened steel SKD61, SKT4, etc. X40CrMoV5 1, 55NiCrMoV6, etc.	40 - 50 HRC	40 - 80	0.03 - 0.07	0.05 - 0.09	0.07 - 0.12	0.08 - 0.13	0.09 - 0.15	0.1 - 0.17	0.1 - 0.17	0.6 x DC	0.05 x DC
	Hardened steel SKD11, SKH, etc. X153CrMoV12, HS18-0-1, etc.	50 - 60 HRC	20 - 60	0.03 - 0.07	0.05 - 0.09	0.07 - 0.12	0.08 - 0.13	0.09 - 0.15	0.1 - 0.17	0.1 - 0.17	0.6 x DC	0.05 x DC

Slot milling (VEH, VEE: 3 flutes, VED/VEE: 4 flutes, VEE-A, VEE-I, VEE-R, VEE-C, VRB, VRC, VRD)

ISO	Workpiece material	Hardness	Cutting speed V _c (m/min)	Feed per tooth: fz (mm/t)							Depth of cut a _p (mm)
				Tool diameter: DC (mm)							
				6	8	10	12	16	20	25	
P	Low carbon steels S45C, S55C, etc. C45, C55, etc.	- 300 HB	80 - 180	0.03 - 0.07	0.05 - 0.09	0.07 - 0.12	0.08 - 0.13	0.09 - 0.15	0.1 - 0.17	0.07 - 0.1	0.5 x DC
	High carbon steels SCM440, SCr415, etc. 42CrMo4, 15Cr3, etc.	- 300 HB	60 - 140	0.03 - 0.07	0.05 - 0.09	0.07 - 0.12	0.08 - 0.13	0.09 - 0.15	0.1 - 0.17	0.07 - 0.1	0.5 x DC
	Prehardened steel PX5, NAK80, etc.	30 - 40 HRC	60 - 120	0.03 - 0.07	0.05 - 0.09	0.07 - 0.12	0.08 - 0.13	0.09 - 0.15	0.1 - 0.17	0.07 - 0.1	0.5 x DC
M	Stainless steels SUS304, SUS316, etc. X5CrNi18-9, X5CrNiMo17-12-2, etc.	- 200 HB	40 - 100	0.03 - 0.07	0.05 - 0.09	0.07 - 0.12	0.08 - 0.13	0.09 - 0.15	0.1 - 0.17	0.07 - 0.1	0.5 x DC
K	Grey cast irons FC250, FC300, etc. 250, 300, etc.	150 - 250 HB	80 - 200	0.03 - 0.07	0.05 - 0.09	0.07 - 0.12	0.08 - 0.13	0.09 - 0.15	0.1 - 0.17	0.07 - 0.1	0.5 x DC
	Ductile cast irons FCD400, etc. 400-15S, etc.	150 - 250 HB	80 - 200	0.03 - 0.07	0.05 - 0.09	0.07 - 0.12	0.08 - 0.13	0.09 - 0.15	0.1 - 0.17	0.07 - 0.10	0.5 x DC
N	Aluminium alloys Si < 13%	-	200 - 700	0.03 - 0.07	0.05 - 0.09	0.07 - 0.12	0.08 - 0.13	0.09 - 0.15	0.1 - 0.17	0.07 - 0.1	0.5 x DC
	Aluminium alloys Si ≥ 13%	-	100 - 300	0.03 - 0.07	0.05 - 0.09	0.07 - 0.12	0.08 - 0.13	0.09 - 0.15	0.1 - 0.17	0.07 - 0.1	0.5 x DC
S	Titanium alloys Ti-6Al-4V, etc.	-	40 - 80	0.03 - 0.07	0.05 - 0.09	0.07 - 0.12	0.08 - 0.13	0.09 - 0.15	0.1 - 0.17	0.07 - 0.1	0.5 x DC
	Heat-resistant alloys Inconel 718, etc.	-	20 - 40	0.03 - 0.07	0.05 - 0.09	0.07 - 0.12	0.08 - 0.13	0.09 - 0.15	0.1 - 0.17	0.07 - 0.1	0.5 x DC
H	Hardened steel SKD61, SKT4, etc. X40CrMoV5 1, 55NiCrMoV6, etc.	40 - 50 HRC	40 - 80	0.03 - 0.07	0.05 - 0.09	0.07 - 0.12	0.08 - 0.13	0.09 - 0.15	0.1 - 0.17	0.07 - 0.1	0.2 x DC
	Hardened steel SKD11, SKH, etc. X153CrMoV12, HS18-0-1, etc.	50 - 60 HRC	20 - 60	0.03 - 0.07	0.05 - 0.09	0.07 - 0.12	0.08 - 0.13	0.09 - 0.15	0.1 - 0.17	0.07 - 0.1	0.2 x DC


Shoulder milling (VED / VEE: 6 flutes, VED / VEE: 8, 10 flutes)

ISO	Workpiece material	Hardness	Cutting speed V _c (m/min)	Feed per tooth: fz (mm/t)						Depth of cut a _p (mm)	Pick feed Pf (mm)
				Tool diameter: DC (mm)							
				8	10	12	16	20	25		
S	Titanium alloys Ti-6Al-4V, etc.	-	60 - 120	0.05 - 0.09	0.07 - 0.12	0.08 - 0.13	0.09 - 0.15	0.1 - 0.17	0.1 - 0.17	0.6 x DC	0.02 x DC
	Heat-resistant alloys Inconel 718, etc.	-	30 - 60	0.05 - 0.09	0.07 - 0.12	0.08 - 0.13	0.09 - 0.15	0.1 - 0.17	0.1 - 0.17	0.6 x DC	0.02 x DC
H	Hardened steel SKD61, SKT4, etc. X40CrMoV5 1, 55NiCrMoV6, etc.	40 - 50 HRC	80 - 160	0.05 - 0.09	0.07 - 0.12	0.08 - 0.13	0.09 - 0.15	0.1 - 0.17	0.1 - 0.17	0.6 x DC	0.02 x DC
	Hardened steel SKD11, SKH, etc. X153CrMoV12, HS18-0-1, etc.	50 - 60 HRC	40 - 90	0.05 - 0.09	0.07 - 0.12	0.08 - 0.13	0.09 - 0.15	0.1 - 0.17	0.1 - 0.17	0.6 x DC	0.02 x DC

Grade
Insert
Ext. Toolholder
Int. Toolholder
Threading
Grooving
Miniature tool
Milling cutter
Endmill
Drilling tool
Tooling System
User's Guide
Index



2 flute head for high feed milling (TungMeister)

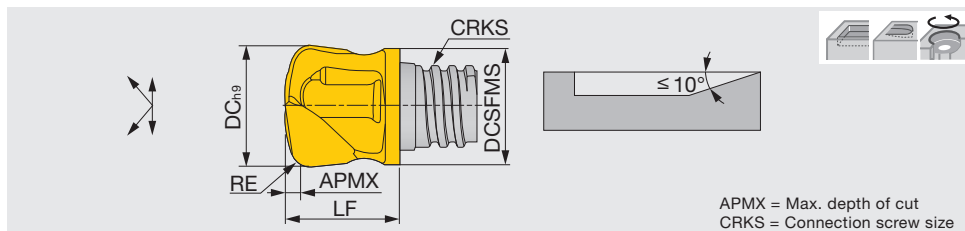

Designation	AH725	NOF	FHA	DC	DCSFMS	APMX	RE ⁽¹⁾	CRKS	LF	Wrench Torque*	fz (mm/t)	
VFX100L00.6R20-02S06	●	2	0°	10	9.6	0.6	2	S06	12.5	KEYV-S06	10	0.3-0.6
VFX120L01.0R25-02S08	●	2	0°	12	11.5	1.0	2.5	S08	11.1	KEYV-S08	15	0.5-1.0
VFX160L01.1R30-02S10	●	2	0°	16	15.2	1.1	3	S10	20	KEYV-S10	28	0.55-1.1
VFX200L01.5R33-02S12	●	2	0°	20	18.3	1.5	3.3	S12	17.5	KEYV-S12	28	0.75-1.5

(1) Corner radius for CAM programming

Note: Please use tapered neck shank or tungsten shank for VFX head.


* Recommended clamping torque (N·m)

2 pieces per package

●: Line up



4 flute head for high feed milling (TungMeister)

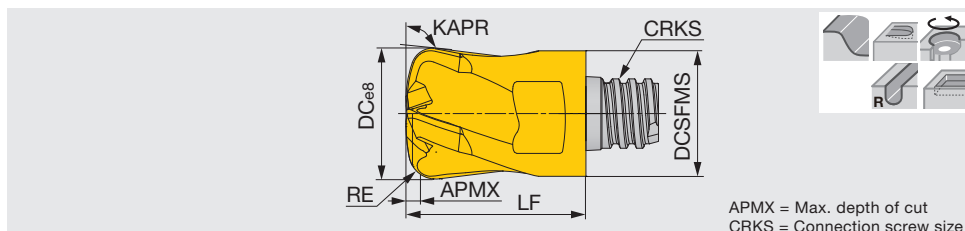

Designation	AH725	NOF	FHA	DC	DCSFMS	APMX	RE	KAPR	CRKS	LF	Wrench Torque*	fz (mm/t)	
VFX120L0.60R18H04S08	●	4	20°	12	11.5	0.6	1.8	97°	S08	16.5	KEYV-S08	15	0.16-0.67
VFX160L0.80R22H04S10	●	4	20°	16	15.4	0.8	2.2	97°	S10	20.5	KEYV-S10	28	0.2-0.75

* Recommended clamping torque (N·m)

2 pieces per package

●: Line up


**STANDARD CUTTING CONDITIONS**

High feed milling (VFX)

ISO	Workpiece material	Hardness	Cutting speed Vc (m/min)	ø10	ø12	ø16	ø20	Width of cut ae (mm)
				Feed per tooth fz (mm/t)	Feed per tooth fz (mm/t)	Feed per tooth fz (mm/t)	Feed per tooth fz (mm/t)	
P	Low carbon steels S45C, S55C, etc. C45, C65, etc.	- 300 HB	100 - 200	0.3 - 0.7	0.4 - 0.8	0.5 - 0.9	0.6 - 1	0.6 x DC
	High carbon steels SCM440, SCR415, etc. 42CrMo4, 15Cr3, etc.	- 300 HB	80 - 180	0.3 - 0.7	0.4 - 0.8	0.5 - 0.9	0.6 x DC	0.6 x DC
	Prehardened steel PX5, NAK80, etc.	30 - 40 HRC	80 - 160	0.2 - 0.5	0.2 - 0.5	0.3 - 0.6	0.3 - 0.6	0.6 x DC
M	Stainless steels SUS304, SUS316, etc. X5CrNi18-9, X5CrNiMo17-12-2, etc.	- 200 HB	60 - 100	0.2 - 0.6	0.2 - 0.6	0.3 - 0.7	0.3 - 0.7	0.6 x DC
K	Grey cast irons FC250, FC300, etc. 250, 300, etc.	150 - 250 HB	100 - 220	0.3 - 0.7	0.4 - 0.8	0.5 - 0.9	0.6 - 1	0.6 x DC
	Ductile cast irons FCD400, etc. 400-15S, etc.	150 - 250 HB	100 - 220	0.2 - 0.6	0.3 - 0.7	0.4 - 0.8	0.5 - 0.9	0.6 x DC
S	Titanium alloys Ti-6Al-4V, etc.	-	40 - 80	0.2 - 0.5	0.2 - 0.5	0.2 - 0.6	0.2 - 0.6	0.25 x DC
	Heat-resistant alloys Inconel 718, etc.	-	20 - 40	0.1 - 0.3	0.1 - 0.3	0.1 - 0.3	0.1 - 0.3	0.25 x DC
H	Hardened steel SKD61, SKT4, etc. X40CrMoV5 1, 55NiCrMoV6, etc.	40 - 50 HRC	40 - 80	0.2 - 0.4	0.2 - 0.4	0.3 - 0.5	0.3 - 0.5	0.45 x DC
	Hardened steel SKD11, SKH, etc. X153CrMoV12, HS18-0-1, etc.	50 - 60 HRC	20 - 60	0.1 - 0.2	0.1 - 0.2	0.1 - 0.3	0.1 - 0.3	0.25 x DC

Feed per tooth should not exceed the maximum value for each product.

2 flute ball nose head for roughing (TungMeister)

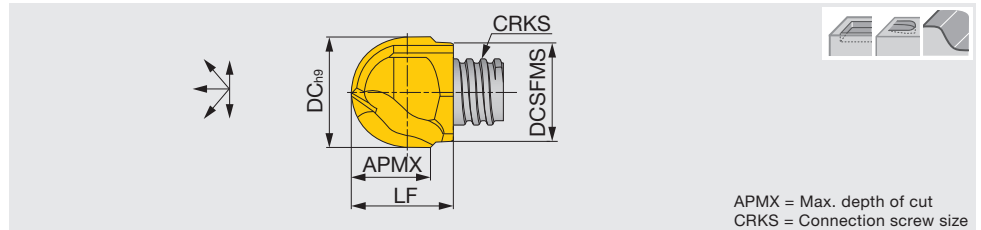


APMX = Max. depth of cut
CRKS = Connection screw size

Designation	AH725	NOF	FHA	DC	DCSFMS	APMX	CRKS	LF	Wrench	Torque*
VBB080L08.0-BM-02S05	●	2	0°	8	7.6	8	S05	10	KEYV-S05	7
VBB100L10.0-BM-02S06	●	2	0°	10	9.5	10	S06	12.4	KEYV-S06	10
VBB120L12.0-BM-02S08	●	2	0°	12	11.5	11.5	S08	15.3	KEYV-S08	15
VBB160L16.0-BM-02S10	●	2	0°	16	15.2	16	S10	19.1	KEYV-S10	28

* Recommended clamping torque(N·m)
2 pieces per package

●: Line up

2 flute ball nose head for semi-finishing (TungMeister)

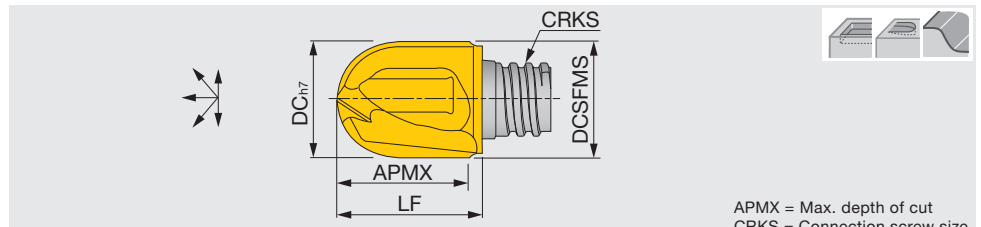


APMX = Max. depth of cut
CRKS = Connection screw size

Designation	AH750	NOF	FHA	DC	DCSFMS	APMX	CRKS	LF	Wrench	Torque*
VBB080L08.0-BG-02S05	●	2	0°	8	7.6	8	S05	10	KEYV-S05	7
VBB100L10.0-BG-02S06	●	2	0°	10	9.6	10	S06	12.4	KEYV-S06	10
VBB120L12.0-BG-02S08	●	2	0°	12	11.5	12	S08	15.3	KEYV-S08	15
VBB160L16.0-BG-02S10	●	2	0°	16	15.2	16	S10	19.1	KEYV-S10	28

* Recommended clamping torque(N·m)
2 pieces per package

●: Line up

Ball nose head with 2 ground flutes for finishing (TungMeister)

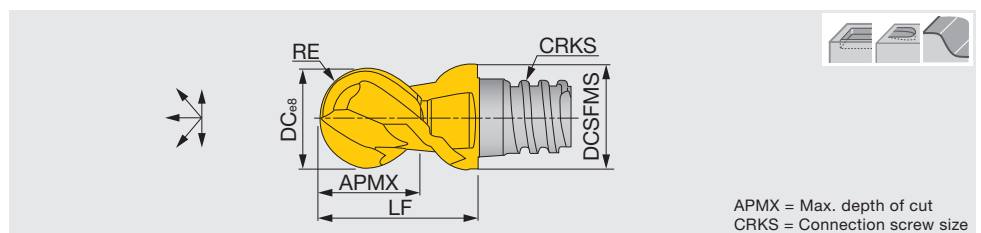

APMX = Max. depth of cut
CRKS = Connection screw size

Designation	AH725	NOF	FHA	DC	DCSFMS	APMX	RE	CRKS	LF	Wrench	Torque*
VBD080L05.0-BG-02S05	●	2	30°	8	7.7	5	3.982 ⁽¹⁾	S05	10	KEYV-S05	7
VBD100L07.0-BG-02S06	●	2	30°	10	9.7	7	4.982 ⁽¹⁾	S06	13	KEYV-S06	10
VBD120L09.0-BG-02S08	●	2	30°	12	11.7	9	5.978 ⁽²⁾	S08	16.5	KEYV-S08	15
VBD160L09.5-BG-02S10	●	2	30°	16	15.3	9	7.978 ⁽²⁾	S10	20.5	KEYV-S10	28

RE tolerance: (1) ± 0.010 (2) ± 0.012


* Recommended clamping torque(N·m)
2 pieces per package

●: Line up

TUNGMEISTER

VBD**-BG..., VBE**-BG...

Ball nose head with 4 ground flutes for finishing (TungMeister)

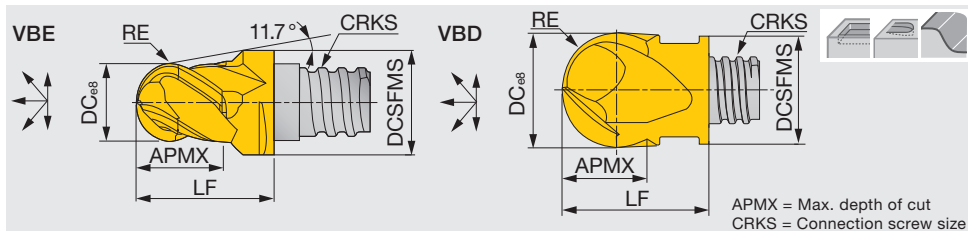

APMX = Max. depth of cut
CRKS = Connection screw size

Designation	AH725	NOF	FHA	DC	DCSFMS	APMX	RE	CRKS	LF	Wrench	Torque*
VBE060L05.5-BG-04S05	●	4	38°	6	8	5.5	2.987 ⁽¹⁾	S05	10	KEYV-S05	7
VBD080L05.0-BG-04S05	●	4	30°	8	7.7	5	3.982 ⁽¹⁾	S05	10	KEYV-S05	7
VBD100L07.0-BG-04S06	●	4	30°	10	9.7	7	4.982 ⁽¹⁾	S06	13	KEYV-S06	10
VBD120L09.0-BG-04S08	●	4	30°	12	11.7	9	5.978 ⁽²⁾	S08	16.5	KEYV-S08	15
VBD160L12.0-BG-04S10	●	4	30°	16	15.3	12	7.978 ⁽²⁾	S10	20.5	KEYV-S10	28
VBD200L15.0-BG-04S12	●	4	30°	20	18.3	15	9.972 ⁽²⁾	S12	25.5	KEYV-S12	28
VBD250L22.0-BG-04S15	●	4	30°	25	23.9	22	12.470 ⁽³⁾	S15	37	KEYV-W20	40

RE tolerance: (1) ± 0.01 (2) ± 0.012 (3) ± 0.02

* Recommended clamping torque(N·m)


VBE060/VBD080 ~ VBD200: 2 pieces per package, VBD250: 1 piece per package

●: Line up

TUNGMEISTER

VBB**-SG...

2 flute ball nose head, with spherical designed edge (TungMeister)

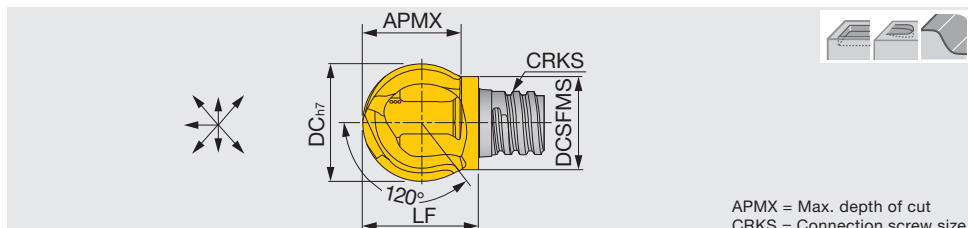

APMX = Max. depth of cut
CRKS = Connection screw size

Designation	AH725	NOF	FHA	DC	DCSFMS	APMX	CRKS	LF	Wrench	Torque*
VBB100L08.0-SG-02S05	●	2	0°	10	7.6	7.5	S05	10	KEYV-S05	7
VBB120L09.6-SG-02S06	●	2	0°	12	9.5	9	S06	11.6	**KEYV-S08	10
VBB160L12.9-SG-02S08	●	2	0°	16	12.2	12	S08	15.4	**KEYV-S10	15
VBB200L16.1-SG-02S10	●	2	0°	20	15.2	15	S10	18.4	KEYV-S10	28

Also capable of pull cutting on the vertical wall

** The wrench size for these heads is different from the ones for the other head types.


* Recommended clamping torque(N·m). 2 pieces per package

●: Line up

TUNGMEISTER

VBE**-BGA...

Ball nose head with 2 ground flutes for aluminium machining (TungMeister)

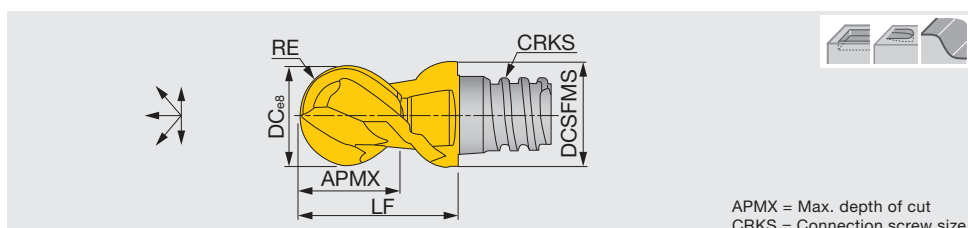

APMX = Max. depth of cut
CRKS = Connection screw size

Designation	KS15F	NOF	FHA	DC	DCSFMS	APMX	RE	CRKS	LF	Wrench	Torque*
VBE080L05.0-BGA02S05	●	2	45°	8	7.7	5	3.982 ⁽¹⁾	S05	10	KEYV-S05	7
VBE100L07.0-BGA02S06	●	2	45°	10	9.7	7	4.982 ⁽¹⁾	S06	13	KEYV-S06	10
VBE120L09.0-BGA02S08	●	2	45°	12	11.7	9	5.987 ⁽²⁾	S08	16.5	KEYV-S08	15
VBE160L12.0-BGA02S10	●	2	45°	16	15.3	12	7.978 ⁽²⁾	S10	20.5	KEYV-S10	28
VBE200L15.0-BGA02S12	●	2	45°	20	18.3	15	9.972 ⁽²⁾	S12	25.5	KEYV-S12	28

RE tolerance: (1) ± 0.01 (2) ± 0.012 * Recommended clamping torque(N·m). 2 pieces per package

●: Line up

Reference pages: Standard cutting conditions → [I075](#)

STANDARD CUTTING CONDITIONS

Standard cutting conditions: Roughing (VBB-BM / BG / SG, VBD-BG, VBE-BGA)

ISO	Workpiece material	Hardness	Cutting speed Vc (m/min)	Feed per tooth: fz (mm/t)								Depth of cut ap (mm)	Pick feed Pf (mm)
				Tool diameter: DC (mm)									
				6	8	10	12	16	20	25			
P	Low carbon steels S45C, S55C, etc. C45, C55, etc.	- 300 HB	100 - 200	0.03 - 0.07	0.04 - 0.08	0.05 - 0.10	0.06 - 0.11	0.07 - 0.13	0.08 - 0.15	0.08 - 0.15	0.3 x DC	0.4 x DC	
	High carbon steels SCM440, SCR415, etc. 42CrMo4, 15Cr3, etc.	- 300 HB	80 - 180	0.03 - 0.07	0.04 - 0.08	0.05 - 0.10	0.06 - 0.11	0.07 - 0.13	0.08 - 0.15	0.08 - 0.15	0.3 x DC	0.4 x DC	
	Prehardened steel PX5, NAK80, etc.	30 - 40 HRC	80 - 160	0.03 - 0.07	0.04 - 0.08	0.05 - 0.10	0.06 - 0.11	0.07 - 0.13	0.08 - 0.15	0.08 - 0.15	0.3 x DC	0.4 x DC	
M	Stainless steels SUS304, SUS316, etc. X5CrNi18-9, X5CrNiMo17-12-2, etc.	- 200 HB	60 - 100	0.03 - 0.07	0.04 - 0.08	0.05 - 0.10	0.06 - 0.11	0.07 - 0.13	0.08 - 0.15	0.08 - 0.15	0.3 x DC	0.4 x DC	
K	Grey cast irons FC250, FC300, etc. 250, 300, etc.	150 - 250 HB	100 - 220	0.03 - 0.07	0.04 - 0.08	0.05 - 0.10	0.06 - 0.11	0.07 - 0.13	0.08 - 0.15	0.08 - 0.15	0.3 x DC	0.4 x DC	
	Ductile cast irons FCD400, etc. 400-15S, etc.	150 - 250 HB	100 - 220	0.03 - 0.07	0.04 - 0.08	0.05 - 0.10	0.06 - 0.11	0.07 - 0.13	0.08 - 0.15	0.08 - 0.15	0.3 x DC	0.4 x DC	
N	Aluminium alloys Si < 13%	-	200 - 700	0.03 - 0.07	0.04 - 0.08	0.05 - 0.10	0.06 - 0.11	0.07 - 0.13	0.08 - 0.15	0.08 - 0.15	0.3 x DC	0.4 x DC	
	Aluminium alloys Si ≥ 13%	-	100 - 300	0.03 - 0.07	0.04 - 0.08	0.05 - 0.10	0.06 - 0.11	0.07 - 0.13	0.08 - 0.15	0.08 - 0.15	0.3 x DC	0.4 x DC	
S	Titanium alloys Ti-6Al-4V, etc.	-	40 - 80	0.03 - 0.07	0.04 - 0.08	0.05 - 0.10	0.06 - 0.11	0.07 - 0.13	0.08 - 0.15	0.08 - 0.15	0.3 x DC	0.2 x DC	
	Heat-resistant alloys Inconel 718, etc.	50 - 60 HRC	20 - 40	0.03 - 0.07	0.04 - 0.08	0.05 - 0.10	0.06 - 0.11	0.07 - 0.13	0.08 - 0.15	0.08 - 0.15	0.3 x DC	0.2 x DC	
H	Hardened steel SKD61, SKT4, etc. X40CrMoV5 1, 55NiCrMoV6, etc.	-	40 - 80	0.03 - 0.07	0.04 - 0.08	0.05 - 0.10	0.06 - 0.11	0.07 - 0.13	0.08 - 0.15	0.08 - 0.15	0.3 x DC	0.2 x DC	
	Hardened steel SKD11, SKH, etc. X153CrMoV12, HS18-0-1, etc.	50 - 60 HRC	20 - 60	0.03 - 0.07	0.04 - 0.08	0.05 - 0.10	0.06 - 0.11	0.07 - 0.13	0.08 - 0.15	0.08 - 0.15	0.3 x DC	0.2 x DC	


Standard cutting conditions: Profiling for semi-finishing and finishing (VBB-BM / BG / SG, VBD-BG, VBE-BGA)

ISO	Workpiece material	Hardness	Cutting speed Vc (m/min)	Feed per tooth: fz (mm/t)								Depth of cut ap (mm)	Pick feed Pf (mm)
				Tool diameter: DC (mm)									
				6	8	10	12	16	20	25			
P	Low carbon steels S45C, S55C, etc. C45, C55, etc.	- 300 HB	120 - 250	0.04 - 0.09	0.06 - 0.11	0.07 - 0.12	0.08 - 0.13	0.09 - 0.16	0.1 - 0.18	0.1 - 0.18	0.1 x DC	0.15 x DC	
	High carbon steels SCM440, SCR415, etc. 42CrMo4, 15Cr3, etc.	- 300 HB	100 - 220	0.04 - 0.09	0.06 - 0.11	0.07 - 0.12	0.08 - 0.13	0.09 - 0.16	0.1 - 0.18	0.1 - 0.18	0.1 x DC	0.15 x DC	
	Prehardened steel PX5, NAK80, etc.	30 - 40 HRC	100 - 200	0.04 - 0.09	0.06 - 0.11	0.07 - 0.12	0.08 - 0.13	0.09 - 0.16	0.1 - 0.18	0.1 - 0.18	0.1 x DC	0.15 x DC	
M	Stainless steels SUS304, SUS316, etc. X5CrNi18-9, X5CrNiMo17-12-2, etc.	- 200 HB	80 - 120	0.04 - 0.09	0.06 - 0.11	0.07 - 0.12	0.08 - 0.13	0.09 - 0.16	0.1 - 0.18	0.1 - 0.18	0.1 x DC	0.15 x DC	
K	Grey cast irons FC250, FC300, etc. 250, 300, etc.	150 - 250 HB	120 - 280	0.04 - 0.09	0.06 - 0.11	0.07 - 0.12	0.08 - 0.13	0.09 - 0.16	0.1 - 0.18	0.1 - 0.18	0.1 x DC	0.15 x DC	
	Ductile cast irons FCD400, etc. 400-15S, etc.	150 - 250 HB	120 - 280	0.04 - 0.09	0.06 - 0.11	0.07 - 0.12	0.08 - 0.13	0.09 - 0.16	0.1 - 0.18	0.1 - 0.18	0.1 x DC	0.15 x DC	
N	Aluminium alloys Si < 13%	-	300 - 1000	0.04 - 0.09	0.06 - 0.11	0.07 - 0.12	0.08 - 0.13	0.09 - 0.16	0.1 - 0.18	0.1 - 0.18	0.1 x DC	0.15 x DC	
	Aluminium alloys Si ≥ 13%	-	150 - 400	0.04 - 0.09	0.06 - 0.11	0.07 - 0.12	0.08 - 0.13	0.09 - 0.16	0.1 - 0.18	0.1 - 0.18	0.1 x DC	0.15 x DC	
S	Titanium alloys Ti-6Al-4V, etc.	-	50 - 100	0.04 - 0.09	0.06 - 0.11	0.07 - 0.12	0.08 - 0.13	0.09 - 0.16	0.1 - 0.18	0.1 - 0.18	0.08 x DC	0.1 x DC	
	Heat-resistant alloys Inconel 718, etc.	50 - 60 HRC	30 - 50	0.04 - 0.09	0.06 - 0.11	0.07 - 0.12	0.08 - 0.13	0.09 - 0.16	0.1 - 0.18	0.1 - 0.18	0.08 x DC	0.1 x DC	
H	Hardened steel SKD61, SKT4, etc. X40CrMoV5 1, 55NiCrMoV6, etc.	-	50 - 100	0.04 - 0.09	0.06 - 0.11	0.07 - 0.12	0.08 - 0.13	0.09 - 0.16	0.1 - 0.18	0.1 - 0.18	0.08 x DC	0.1 x DC	
	Hardened steel SKD11, SKH, etc. X153CrMoV12, HS18-0-1, etc.	50 - 60 HRC	30 - 80	0.04 - 0.09	0.06 - 0.11	0.07 - 0.12	0.08 - 0.13	0.09 - 0.16	0.1 - 0.18	0.1 - 0.18	0.08 x DC	0.1 x DC	

TUNGMEISTER

VCP**-02...

2 flute head, for spot drilling and chamfering (TungMeister)

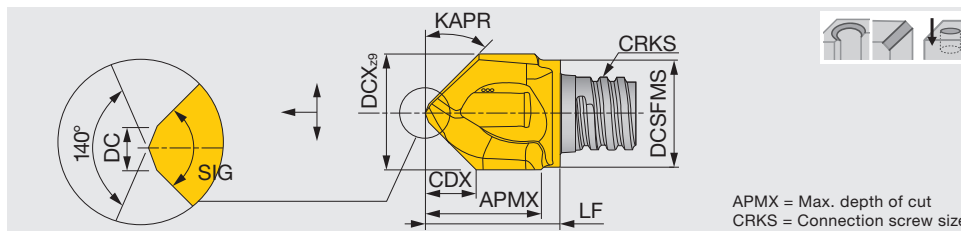

APMX = Max. depth of cut
CRKS = Connection screw size

Designation	AH725	NOF	SIG	FHA	DCX	DCSFMS	APMX	CDX	CRKS	LF	DC	KAPR	Wrench	Torque*
VCP100L09.5A30-02S06	●	2	60°	0°	10	9.5	8.5	7.5	S06	11.75	1.5	60°	KEYV-S06	10
VCP120L12.0A30-02S08	●	2	60°	0°	12	11.5	11	9.2	S08	15.4	1.5	60°	KEYV-S08	15
VCP160L15.0A30-02S10	●	2	60°	0°	16	15.2	16	12	S10	20.2	2.5	60°	KEYV-S10	28
VCP080L07.7A45-02S05	●	2	90°	0°	8	7.6	7.5	3.7	S05	9.75	1	45°	KEYV-S05	7
VCP083L07.9A45-02S05	●	2	90°	0°	8.3	7.6	7.5	3.8	S05	10	1	45°	KEYV-S05	7
VCP100L09.0A45-02S06	●	2	90°	0°	10	9.5	9.5	4.4	S06	11.75	1.5	45°	KEYV-S06	10
VCP104L09.0A45-02S06	●	2	90°	0°	10.4	9.5	9.5	4.6	S06	11.75	1.5	45°	KEYV-S06	10
VCP120L12.0A45-02S08	●	2	90°	0°	12	11.5	11.5	5.4	S08	15.4	1.5	45°	KEYV-S08	15
VCP124L12.0A45-02S08	●	2	90°	0°	12.4	11.5	11.5	5.6	S08	15.4	1.5	45°	KEYV-S08	15
VCP160L15.0A45-02S10	●	2	90°	0°	16	15.2	15	7.1	S10	18.8	1.5	45°	KEYV-S10	28
VCP165L15.0A45-02S10	●	2	90°	0°	16.5	15.2	15	7.1	S10	18.8	1.5	45°	KEYV-S10	28
VCP100L09.5A60-02S06	●	2	120°	0°	10	9.5	9.5	2.7	S06	12.7	1.5	30°	KEYV-S06	10
VCP120L12.0A60-02S08	●	2	120°	0°	12	11.5	11.5	3.3	S08	15.2	1.5	30°	KEYV-S08	15
VCP160L15.5A60-02S10	●	2	120°	0°	16	15.2	16	4.4	S10	19.9	1.5	30°	KEYV-S10	28


●: Line up

Minimum hole diameter $\phi 1.5$ mm
* Recommended clamping torque(N·m)
2 pieces per package

TUNGMEISTER

VDP**-02...

2 flute head, with chamfered edge, for spot drilling (TungMeister)

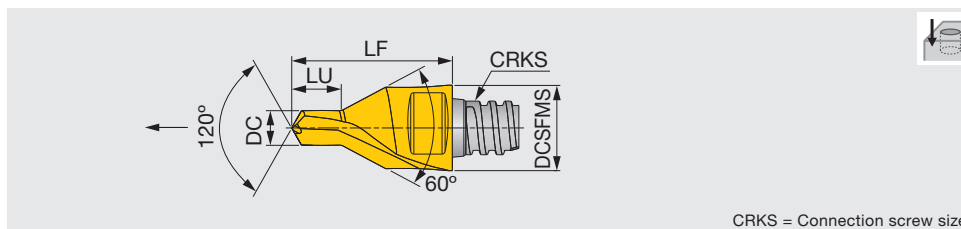

CRKS = Connection screw size

Designation	AH725	NOF	FHA	DC ± 0.02	DCSFMS	LU	CRKS	LF	Wrench	Torque*
VDP328L04.6A30-02S05	●	2	0°	3.28	8	4.6	S05	15	KEYV-S05	7
VDP412L05.9A30-02S06	●	2	0°	4.12	10	5.9	S06	19	KEYV-S06	10
VDP513L07.2A30-02S08	●	2	0°	5.13	12	7.2	S08	23	KEYV-S08	15
VDP646L08.9A30-02S10	●	2	0°	6.46	16	8.9	S10	28	KEYV-S10	28

●: Line up

* Recommended clamping torque(N·m)
2 pieces per package

Reference pages: Standard cutting conditions → [I077](#)

STANDARD CUTTING CONDITIONS


Drilling (VCP, VDP)

ISO	Workpiece material	Hardness	Cutting speed Vc (m/min)	Feed: f (mm/rev)				
				VDP328	VDP412	VDP513	VDP646	VCP
P	Low carbon steels S45C, S55C, etc. C45, C55, etc.	- 300 HB	40 - 80	0.04 - 0.08	0.05 - 0.10	0.05 - 0.10	0.06 - 0.12	0.06 - 0.12
	High carbon steels SCM440, SCr415, etc. 42CrMo4, 15Cr3, etc.	- 300 HB	30 - 50	0.04 - 0.08	0.05 - 0.10	0.05 - 0.10	0.06 - 0.12	0.06 - 0.12
	Prehardened steel PX5, NAK80, etc.	30 - 40 HRC	20 - 30	0.04 - 0.08	0.05 - 0.10	0.05 - 0.10	0.06 - 0.12	0.06 - 0.12
M	Stainless steels SUS304, SUS316, etc. X5CrNi18-9, X5CrNiMo17-12-2, etc.	- 200 HB	15 - 25	0.04 - 0.08	0.05 - 0.10	0.05 - 0.10	0.06 - 0.12	0.06 - 0.12
K	Grey cast irons FC250, FC300, etc. 250, 300, etc.	150 - 250 HB	60 - 100	0.05 - 0.09	0.07 - 0.12	0.07 - 0.12	0.12 - 0.18	0.12 - 0.18
	Ductile cast irons FCD400, etc. 400-15S, etc.	150 - 250 HB	60 - 100	0.04 - 0.08	0.05 - 0.10	0.05 - 0.10	0.10 - 0.15	0.10 - 0.15
S	Titanium alloys Ti-6Al-4V, etc.	-	15 - 25	0.04 - 0.07	0.04 - 0.07	0.04 - 0.07	0.04 - 0.07	0.04 - 0.07
	Heat-resistant alloys Inconel 718, etc.	-	10 - 20	0.03 - 0.06	0.03 - 0.06	0.03 - 0.06	0.03 - 0.06	0.03 - 0.06
H	Hardened steel	SKD61, SKT4, etc. X40CrMoV5 1, 55NiCrMoV6, etc.	40 - 50 HRC	15 - 25	0.04 - 0.07	0.04 - 0.07	0.04 - 0.07	0.04 - 0.07
		SKD11, SKH, etc. X153CrMoV12, HS18-0-1, etc.	50 - 60 HRC	10 - 20	0.03 - 0.06	0.03 - 0.06	0.03 - 0.06	0.03 - 0.06

Grade
Insert
Ext. Toolholder
Int. Toolholder
Threading
Grooving
Miniature tool
Milling cutter
Endmill
Drilling tool
Tooling System
User's Guide
Index



2 flute head, for counterboring (TungMeister)

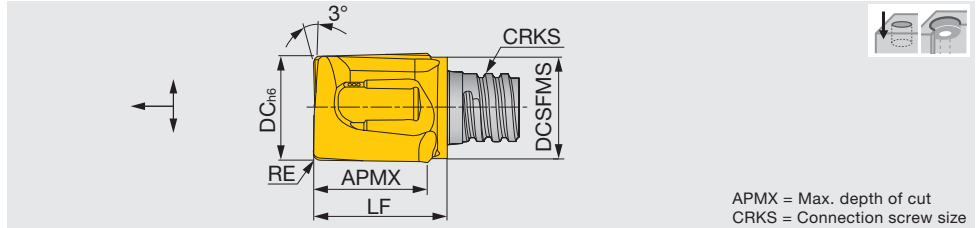

APMX = Max. depth of cut
CRKS = Connection screw size

Designation	AH725	NOF	FHA	DC	DCSFMS	APMX	RE	CRKS	LF	Wrench	Torque*
VGC078L08.0R02-02S05	●	2	10°	7.8	7.6	7.7	0.2	S05	10	KEYV-S05	7
VGC080L08.0R04-02S05	●	2	10°	8	7.6	7.7	0.4	S05	10	KEYV-S05	7
VGC080L08.0R10-02S05	●	2	10°	8	7.6	7.7	1	S05	10	KEYV-S05	7
VGC080L08.0R20-02S05	●	2	10°	8	7.6	7.7	2	S05	10	KEYV-S05	7
VGC098L09.0R03-02S06	●	2	10°	9.8	9.5	9	0.3	S06	12.4	KEYV-S06	10
VGC100L09.0R04-02S06	●	2	10°	10	9.5	9	0.4	S06	12.4	KEYV-S06	10
VGC100L09.0R10-02S06	●	2	10°	10	9.5	9	1	S06	12.4	KEYV-S06	10
VGC100L09.0R20-02S06	●	2	10°	10	9.5	9	2	S06	12.4	KEYV-S06	10
VGC117L10.0R03-02S08	●	2	10°	11.7	11.5	10	0.3	S08	14.2	KEYV-S08	15
VGC120L10.0R04-02S08	●	2	10°	12	11.5	10	0.4	S08	14.2	KEYV-S08	15
VGC120L10.0R10-02S08	●	2	10°	12	11.5	10	1	S08	14.2	KEYV-S08	15
VGC120L10.0R20-02S08	●	2	10°	12	11.5	10	2	S08	14.2	KEYV-S08	15
VGC157L15.0R03-02S10	●	2	10°	15.7	15.2	15	0.3	S10	19	KEYV-S10	28
VGC160L15.0R04-02S10	●	2	10°	16	15.2	14.9	0.4	S10	19	KEYV-S10	28
VGC160L15.0R08-02S10	●	2	10°	16	15.2	14.9	0.8	S10	19	KEYV-S10	28

Also capable of drilling with step feed (Max. depth = ap x 0.5)

* Recommended clamping torque(N·m)

2 pieces per package

●: Line up

Reference pages: Standard cutting conditions → [I079](#)

STANDARD CUTTING CONDITIONS

Counter boring (VGC)

ISO	Workpiece material	Hardness	Cutting speed Vc (m/min)	Feed per tooth fz (mm/t)
P	Low carbon steels S45C, S55C, etc. C45, C55, etc.	- 300 HB	40 - 80	0.04 - 0.08
	High carbon steels SCM440, SCr415, etc. 42CrMo4, 15Cr3, etc.	- 300 HB	30 - 50	0.04 - 0.08
	Prehardened steel PX5, NAK80, etc.	30 - 40 HRC	20 - 30	0.04 - 0.08
M	Stainless steels SUS304, SUS316, etc. X5CrNi18-9, X5CrNiMo17-12-2, etc.	- 200 HB	15 - 25	0.04 - 0.08
K	Grey cast irons FC250, FC300, etc. 250, 300, etc.	150 - 250 HB	60 - 100	0.05 - 0.09
	Ductile cast irons FCD400, etc. 400-15S, etc.	150 - 250 HB	60 - 100	0.04 - 0.08
S	Titanium alloys Ti-6Al-4V, etc.	-	15 - 25	0.04 - 0.07
	Heat-resistant alloys Inconel 718, etc.	-	10 - 20	0.03 - 0.06
H	Hardened steel	SKD61, SKT4, etc. X40CrMoV5 1, 55NiCrMoV6, etc.	40 - 50 HRC	0.04 - 0.07
		SKD11, SKH, etc. X153CrMoV12, HS18-0-1, etc.	50 - 60 HRC	0.03 - 0.06

Grade

Insert

Ext. Toolholder

Int. Toolholder

Threading

Grooving

Miniature tool

Milling cutter

Endmill

Drilling tool

Tooling System

User's Guide


Index



TUNGMEISTER

VCA**-04,06...

4 or 6 flute head, without center cutting edge, for countersinking and chamfering (TungMeister)

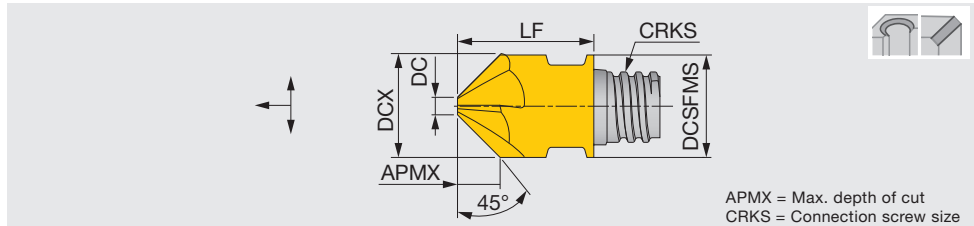APMX = Max. depth of cut
CRKS = Connection screw size

Designation	AH725	NOF	FHA	DCX	DCSFMS	APMX	DC	CRKS	LF	Wrench	Torque*
VCA100L04.0A45-04S06	●	4	0°	10	10	4	1.95	S06	13	KEYV-S06	10
VCA120L05.0A45-04S08	●	4	0°	12	12	5	1.95	S08	16.5	KEYV-S08	15
VCA127L05.3A45-04S08	●	4	0°	12.7	12.7	5.3	1.98	S08	16.5	KEYV-S08	15
VCA160L06.5A45-06S10	●	6	0°	16	16	6.5	3	S10	20.3	KEYV-S10	28
VCA200L07.5A45-06S12	●	6	0°	20	18.3	7.5	5	S12	25.5	KEYV-S12	28


* Recommended clamping torque(N·m)
2 pieces per package

●: Line up

TUNGMEISTER

VCW**-02...

2 flute head, for front and back chamfering (TungMeister)

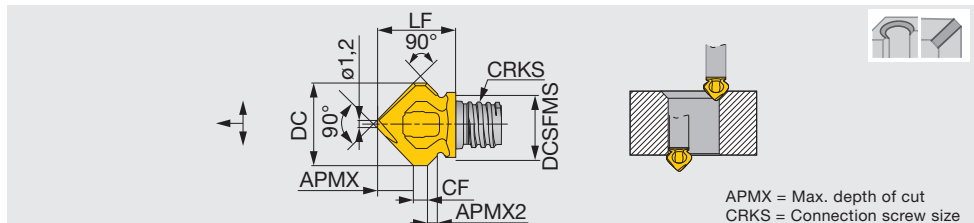APMX = Max. depth of cut
CRKS = Connection screw size

Designation	AH725	NOF	FHA	DC	DCSFMS	APMX	APMX2	CF	CRKS	LF	Wrench	Torque*
VCW118L05.0A45-02S06	●	2	0°	11.8	9.3	5	1.2	2	S06	11.2	KEYV-S08	10


Also capable of reverse chamfering
* The wrench size for these heads is different from the ones for the other head types.
* Recommended clamping torque(N·m)
2 pieces per package

●: Line up

TUNGMEISTER

VCR**-02...

2 flute head, for concave radius chamfering (TungMeister)

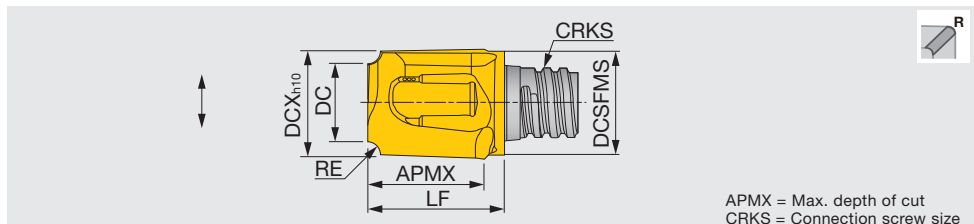APMX = Max. depth of cut
CRKS = Connection screw size

Designation	AH725	NOF	FHA	DCX	DCSFMS	DC	APMX	RE	CRKS	LF	Wrench	Torque*
VCR080L07.5R10-02S05	●	2	0°	8	7.6	5.8	7.5	1	S05	10.5	KEYV-S05	7
VCR100L09.5R16-02S06	●	2	0°	10	9.5	6.8	9.5	1.6	S06	12.5	KEYV-S06	10
VCR100L09.5R25-02S06	●	2	0°	10	9.5	5.1	9.5	2.5	S06	12.5	KEYV-S06	10
VCR127L12.0R30-02S08	●	2	0°	12.7	12.2	6.5	12	3	S08	15.6	KEYV-S08	15
VCR127L12.0R40-02S08	●	2	0°	12.7	12.2	4.7	12	4	S08	15.6	KEYV-S08	15
VCR160L15.0R50-02S10	●	2	0°	16	15.2	6.2	15	5	S10	19.1	KEYV-S10	28
VCR200L07.0R60-02S12	●	2	0°	20	18.3	8	7	6	S12	17.4	KEYV-S12	28

* Recommended clamping torque(N·m)
2 pieces per package

●: Line up

Reference pages: Standard cutting conditions → I081

STANDARD CUTTING CONDITIONS

Chamfering and countersinking (VCA, VCW, VCR, VCP)

ISO	Workpiece material	Hardness	Cutting speed Vc (m/min)	Feed f (mm/rev)	
P	Low carbon steels S45C, S55C, etc. C45, C55, etc.	- 300 HB	60 - 100	0.06 - 0.12	
	High carbon steels SCM440, SCr415, etc. 42CrMo4, 15Cr3, etc.	- 300 HB	50 - 80	0.06 - 0.12	
	Prehardened steel PX5, NAK80, etc.	30 - 40 HRC	40 - 70	0.06 - 0.12	
M	Stainless steels SUS304, SUS316, etc. X5CrNi18-9, X5CrNiMo17-12-2, etc.	- 200 HB	30 - 50	0.06 - 0.12	
K	Grey cast irons FC250, FC300, etc. 250, 300, etc.	150 - 250 HB	80 - 120	0.06 - 0.12	
	Ductile cast irons FC250, FC300, etc. 400-15S, etc.	150 - 250 HB	80 - 120	0.06 - 0.12	
N	Aluminium alloys	-	100 - 200	0.08 - 0.15	
S	Titanium alloys Ti-6Al-4V, etc.	-	30 - 50	0.05 - 0.1	
	Heat-resistant alloys Inconel 718, etc.	-	20 - 40	0.04 - 0.08	
H	Hardened steel	SKD61, SKT4, etc. X40CrMoV5 1, 55NiCrMoV6, etc.	40 - 50 HRC	30 - 50	0.05 - 0.1
		SKD11, SKH, etc. X153CrMoV12, HS18-0-1, etc.	50 - 60 HRC	20 - 40	0.04 - 0.08

TOLERANCE OF TOOL DIAMETER


Basic dimensions (mm)		Permissible dimensional deviations (µm)						
>	≤	e8	e9	h6	h7	h9	h10	z9
6	10	-25 -47	-25 -61	0 -9	0 -15	0 -36	0 -58	+78 +42
10	14	-32 -59	-32 -75	0 -11	0 -18	0 -43	0 -70	+93 +50
14	18	-32 -59	-32 -75	0 -11	0 -18	0 -43	0 -70	+103 +60
18	30	-40 -73	-40 -92	0 -13	0 -21	0 -52	0 -84	-

JISB0401-2: 1998 (ISO286-2: 1988) extract

Grade
Insert
Ext. Toolholder
Int. Toolholder
Threading
Grooving
Miniature tool
Milling cutter
Endmill
Drilling tool
Tooling System
User's Guide
Index

A
B
C
D
E
F
G
H
I
J
K
L
M

3 tooth slotting head, 1.2-3.17 mm slot width (TungMeister)

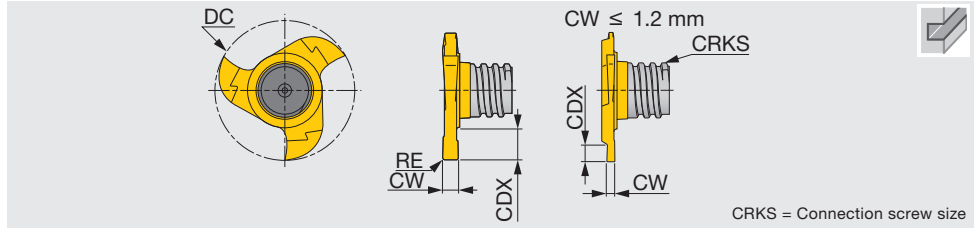

CRKS = Connection screw size

Designation	GH130	NOF	FHA	DC	CW ^{0.02}	RE	CRKS	CDX	Wrench	Torque*
VST157W1.50R010-3S06	●	3	0°	15.7	1.5	0.1	S06	2.8	KEYV-177	10
VST157W1.57R020-3S06	●	3	0°	15.7	1.57	0.2	S06	2.8	KEYV-177	10
VST157W2.00R020-3S06	●	3	0°	15.7	2	0.2	S06	2.8	KEYV-177	10
VST157W2.39R020-3S06	●	3	0°	15.7	2.39	0.2	S06	2.8	KEYV-177	10
VST157W2.50R020-3S06	●	3	0°	15.7	2.5	0.2	S06	2.8	KEYV-177	10
VST157W3.00R020-3S06	●	3	0°	15.7	3	0.2	S06	2.8	KEYV-177	10
VST157W3.17R020-3S06	●	3	0°	15.7	3.17	0.2	S06	2.8	KEYV-177	10
VST177W1.20R005-3S06	●	3	0°	17.7	1.2 ⁽¹⁾	0.05	S06	3.8	KEYV-177	10
VST177W1.40R005-3S06	●	3	0°	17.7	1.4 ⁽¹⁾	0.05	S06	3.8	KEYV-177	10
VST177W1.50R010-3S06	●	3	0°	17.7	1.5	0.1	S06	3.8	KEYV-177	10
VST177W1.57R020-3S06	●	3	0°	17.7	1.57	0.2	S06	3.8	KEYV-177	10
VST177W1.70R005-3S06	●	3	0°	17.7	1.7 ⁽¹⁾	0.05	S06	3.8	KEYV-177	10
VST177W2.00R020-3S06	●	3	0°	17.7	2	0.2	S06	3.8	KEYV-177	10
VST177W2.20R110-3S06	●	3	0°	17.7	2.2	1.1	S06	3.8	KEYV-177	10
VST177W2.39R020-3S06	●	3	0°	17.7	2.39	0.2	S06	3.8	KEYV-177	10
VST177W2.50R020-3S06	●	3	0°	17.7	2.5	0.2	S06	3.8	KEYV-177	10
VST177W3.00R020-3S06	●	3	0°	17.7	3	0.2	S06	3.8	KEYV-177	10
VST177W3.17R020-3S06	●	3	0°	17.7	3.17	0.2	S06	3.8	KEYV-177	10

(1) CW is based on DIN471/472.

* Recommended clamping torque(N·m)

2 pieces per package


●: Line up

Reference pages: Standard cutting conditions → **I085**

TUNGMEISTER

VST**-4,6...

4 or 6 tooth slotting head, 0.76-10.0 mm slot width (TungMeister)

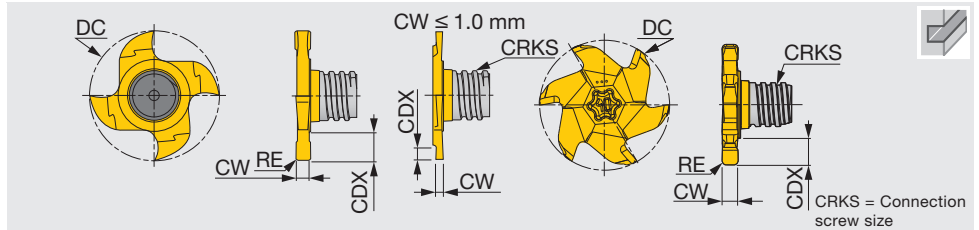

Designation	GH130	NOF	FHA	DC	CW ^{0.02}	RE	CRKS	CDX	Wrench	Torque*
VST217W0.76R000-4S08	●	4	0°	21.7	0.76 ⁽¹⁾	-	S08	1.5	KEYV-217	15
VST217W0.86R000-4S08	●	4	0°	21.7	0.86 ⁽¹⁾	-	S08	1.7	KEYV-217	15
VST217W0.96R000-4S08	●	4	0°	21.7	0.96 ⁽¹⁾	-	S08	1.9	KEYV-217	15
VST217W1.00R005-4S08	●	4	0°	21.7	1	0.05	S08	2	KEYV-217	15
VST217W1.20R005-4S08	●	4	0°	21.7	1.2 ⁽¹⁾	0.05	S08	4.5	KEYV-217	15
VST217W1.40R005-4S08	●	4	0°	21.7	1.4 ⁽¹⁾	0.05	S08	4.5	KEYV-217	15
VST217W1.57R000-4S08	●	4	0°	21.7	1.57	-	S08	4.5	KEYV-217	15
VST217W1.70R010-4S08	●	4	0°	21.7	1.7 ⁽¹⁾	0.1	S08	4.5	KEYV-217	15
VST217W1.95R020-4S08	●	4	0°	21.7	1.95 ⁽¹⁾	0.2	S08	4.5	KEYV-217	15
VST217W2.00R020-4S08	●	4	0°	21.7	2	0.2	S08	4.5	KEYV-217	15
VST217W2.25R020-4S08	●	4	0°	21.7	2.25 ⁽¹⁾	0.2	S08	4.5	KEYV-217	15
VST217W2.39R020-4S08	●	4	0°	21.7	2.39	0.2	S08	4.5	KEYV-217	15
VST217W2.50R020-4S08	●	4	0°	21.7	2.5	0.2	S08	4.5	KEYV-217	15
VST217W2.75R020-4S08	●	4	0°	21.7	2.75 ⁽¹⁾	0.2	S08	4.5	KEYV-217	15
VST217W3.00R020-4S08	●	4	0°	21.7	3	0.2	S08	4.5	KEYV-217	15
VST217W3.17R020-4S08	●	4	0°	21.7	3.17	0.2	S08	4.5	KEYV-217	15
VST217W3.25R020-4S08	●	4	0°	21.7	3.25 ⁽¹⁾	0.2	S08	4.5	KEYV-217	15
VST217W4.00R020-4S08	●	4	0°	21.7	4	0.2	S08	4.5	KEYV-217	15
VST217W4.25R020-4S08	●	4	0°	21.7	4.25 ⁽¹⁾	0.2	S08	4.5	KEYV-217	15
VST217W4.75R020-4S08	●	4	0°	21.7	4.75	0.2	S08	4.5	KEYV-217	15
VST217W5.25R020-4S08	●	4	0°	21.7	5.25 ⁽¹⁾	0.2	S08	4.5	KEYV-217	15
VST277W2.50R020-6S10	●	6	0°	27.7	2.5	0.2	S10	6	KEYV-T40L	28
VST277W5.25R020-6S10	●	6	0°	27.7	5.25	0.2	S10	6	KEYV-T40L	28
VST277W10.0R020-6S10	●	6	0°	27.7	10	0.2	S10	6	KEYV-T40L	28

(1) CW is based on DIN471/472.

* Recommended clamping torque(N·m)


2 pieces per package

●: Line up

TUNGMEISTER

VST**A45...

3 or 4 tooth slotting head, for chamfering (TungMeister)

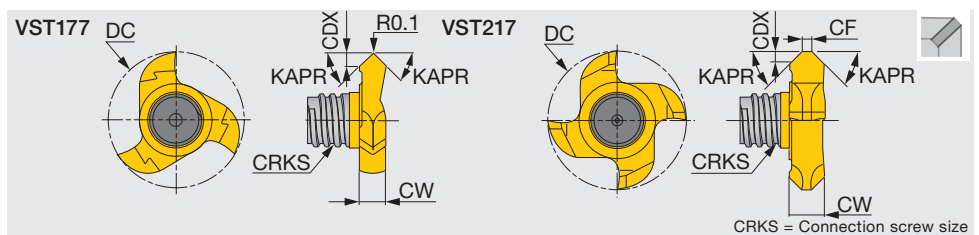

Designation	GH130	NOF	FHA	DC	CW	KAPR	CRKS	CDX	CF	Wrench	Torque*
VST177L01.40A45-3S06	●	3	0°	17.7	3.4	45°	S06	1.4	-	KEYV-177	10
VST217L01.70A45-4S08	●	4	0°	21.7	5.5	45°	S08	1.7	1.5	KEYV-217	15

* Recommended clamping torque(N·m)

2 pieces per package

●: Line up


Reference pages: Standard cutting conditions → I085



TUNGMEISTER

VTB**-06...

6 tooth T-slotting head, 3-8 mm slot width (TungMeister)

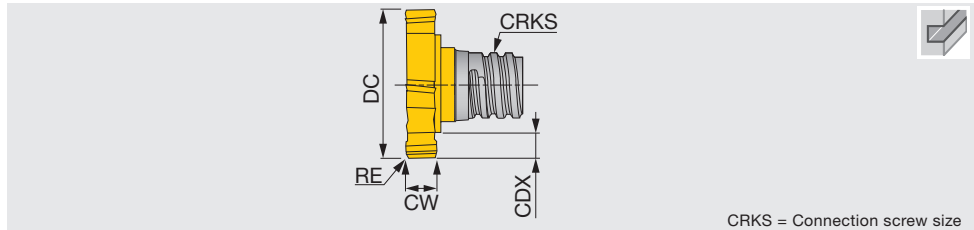

CRKS = Connection screw size

Designation	GH130	NOF	FHA	DC - ⁰ / _{0.05}	CW ^{+0.02}	CDX	CRKS	RE	Wrench	Torque*
VTB135W3.00R04-06S05	●	6	0°	13.5	3	2.65	S05	0.4	KEYV-T20	7
VTB135W4.00R04-06S05	●	6	0°	13.5	4	2.65	S05	0.4	KEYV-T20	7
VTB160W2.00R04-06S06	●	6	0°	16	2	2.9	S06	0.4	KEYV-T20	10
VTB160W3.00R04-06S06	●	6	0°	16	3	2.9	S06	0.4	KEYV-T25	10
VTB160W4.00R04-06S06	●	6	0°	16	4	2.9	S06	0.4	KEYV-T25	10
VTB165W3.00R04-06S06	●	6	0°	16.5	2	3.15	S06	0.4	KEYV-T20	10
VTB165W4.00R04-06S06	●	6	0°	16.5	3	3.15	S06	0.4	KEYV-T25	10
VTB195W4.00R04-06S08	●	6	0°	19.5	4	3.45	S08	0.4	KEYV-T30L	15
VTB195W5.00R04-06S08	●	6	0°	19.5	5	3.45	S08	0.4	KEYV-T30L	15
VTB195W6.00R04-06S08	●	6	0°	19.5	6	3.45	S08	0.4	KEYV-T30L	15
VTB225W5.00R04-06S08	●	6	0°	22.5	5	4.95	S08	0.4	KEYV-T40L	15
VTB225W6.00R04-06S08	●	6	0°	22.5	6	4.95	S08	0.4	KEYV-T40L	15
VTB225W8.00R04-06S08	●	6	0°	22.5	8	4.95	S08	0.4	KEYV-T40L	15
VTB250W6.00R04-06S08	●	6	0°	25	6	5.9	S08	0.4	KEYV-T50L	15
VTB250W8.00R04-06S08	●	6	0°	25	8	5.9	S08	0.4	KEYV-T50L	15
VTB250W5.00R04-06S10	●	6	0°	25	5	4.3	S10	0.4	KEYV-T50L	28
VTB250W6.00R04-06S10	●	6	0°	25	6	4.3	S10	0.4	KEYV-T50L	28
VTB250W8.00R04-06S10	●	6	0°	25	8	4.3	S10	0.4	KEYV-T50L	28


* Recommended clamping torque(N·m)
2 pieces per package

●: Line up

TUNGMEISTER

VTB**C15-06...

6 tooth T-slotting head, with chamfered edge, 2 mm slot width (TungMeister)

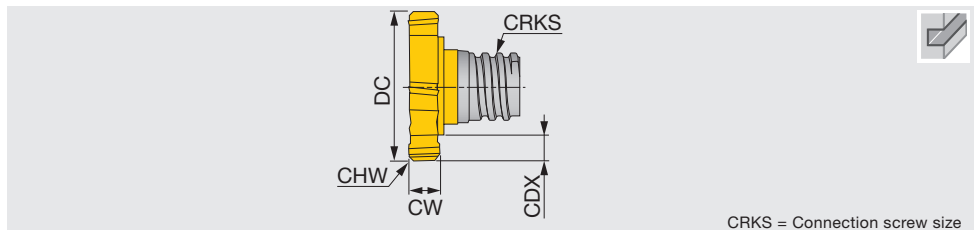

CRKS = Connection screw size

Designation	GH130	NOF	FHA	DC - ⁰ / _{0.05}	CW ^{+0.05}	CDX	CRKS	CHW	Wrench	Torque*
VTB135W2.00C15-06S05	●	6	0°	13.5	2	2.65	S05	0.15	KEYV-T20	7

* Recommended clamping torque(N·m)
2 pieces per package

●: Line up

Reference pages: Standard cutting conditions → I085

STANDARD CUTTING CONDITIONS

Slotting (VST, VTB)

ISO	Workpiece material	Hardness HB	VST type		VTB type	
			Cutting speed Vc (m/min)	Feed per tooth fz (mm/t)	Cutting speed Vc (m/min)	Feed per tooth fz (mm/t)
P	Low carbon steels S45C, S55C, etc. C45, C55, etc.	- 300	80 - 180	0.05 - 0.15	80 - 180	0.08 - 0.18
	High carbon steels SCM440, SCr415, etc. 42CrMo4, 15Cr3, etc.	- 300	60 - 120	0.04 - 0.12	60 - 120	0.05 - 0.15
M	Stainless steels SUS304, SUS316, etc. X5CrNi18-9, X5CrNiMo17-12-2, etc.	- 200	50 - 120	0.04 - 0.12	50 - 120	0.05 - 0.15
K	Grey cast irons FC250, FC300, etc. 250, 300, etc.	150 - 250	100 - 200	0.05 - 0.15	100 - 200	0.08 - 0.18
	Ductile cast irons FCD400, etc. 400-15S, etc.	150 - 250	100 - 200	0.04 - 0.12	100 - 200	0.05 - 0.15
N	Aluminium alloys Si < 13%	-	200 - 600	0.05 - 0.15	200 - 600	0.08 - 0.18
	Aluminium alloys Si ≥ 13%	-	100 - 300	0.03 - 0.13	100 - 300	0.05 - 0.15
S	Titanium alloys Ti-6Al-4V, etc.	-	40 - 60	0.04 - 0.12	40 - 60	0.05 - 0.15
	Heat-resistant alloys Inconel 718, etc.	-	15 - 35	0.02 - 0.1	15 - 35	0.02 - 0.1

Grade

Insert

Toolholder

Ext. Toolholder

Int. Toolholder

Threading

Grooving

Miniature tool

Milling cutter

Endmill


Drilling tool

Tooling System

User's Guide


Index

Cylindrical shank + straight neck, with coolant hole (TungMeister)

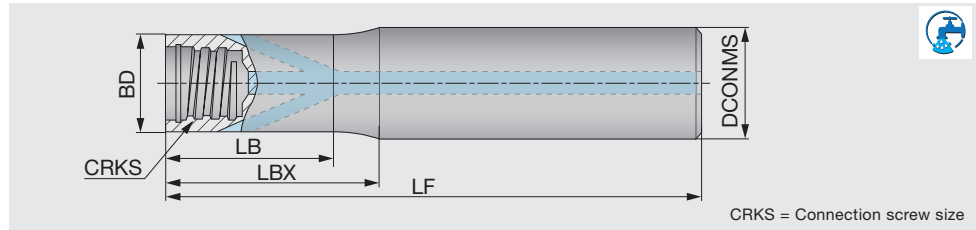


Designation	DCONMS	BD	LF	LBX	LB	CRKS	Shank shape	Shank material
VSSD10L070S06-W-A	10	9.6	70	20	19	S06	Cylindrical	Tungsten
VSSD10L090S06-W-A	10	9.6	90	40	39	S06	Cylindrical	Tungsten
VSSD10L110S06-W-A	10	9.6	110	60	59	S06	Cylindrical	Tungsten
VSSD12L070S08-W-A	12	11.5	70	20	19	S08	Cylindrical	Tungsten
VSSD12L090S08-W-A	12	11.5	90	40	39	S08	Cylindrical	Tungsten
VSSD12L110S08-W-A	12	11.5	110	60	59	S08	Cylindrical	Tungsten
VSSD12L130S08-W-A	12	11.5	130	80	79	S08	Cylindrical	Tungsten
VSSD16L070S10-W-A	16	15.2	70	20	18.5	S10	Cylindrical	Tungsten
VSSD16L090S10-W-A	16	15.2	90	40	36.5	S10	Cylindrical	Tungsten
VSSD16L110S10-W-A	16	15.2	110	60	58.5	S10	Cylindrical	Tungsten
VSSD16L130S10-W-A	16	15.2	130	80	78.5	S10	Cylindrical	Tungsten
VSSD20L090S12-W-A	20	18.3	90	40	37	S12	Cylindrical	Tungsten
VSSD20L130S12-W-A	20	18.3	130	80	77	S12	Cylindrical	Tungsten

Cylindrical shank + straight neck (TungMeister)

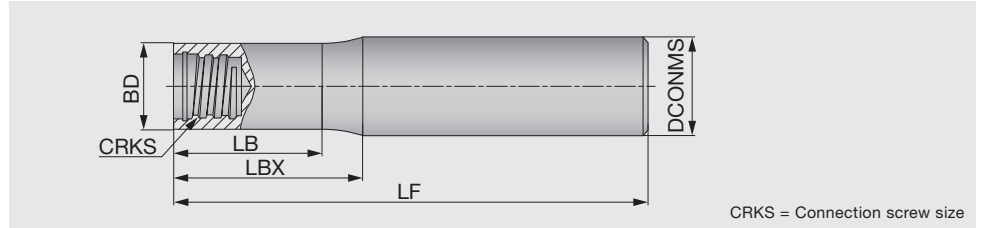


Designation	DCONMS	BD	LF	LBX	LB	CRKS	Shank shape	Shank material
VSSD08L060S05-S	8	7.6	60	15	12.5	S05	Cylindrical	Steel
VSSD08L070S05-C	8	7.6	70	20	18.5	S05	Cylindrical	Carbide
VSSD08L090S05-C	8	7.6	90	40	38.5	S05	Cylindrical	Carbide
VSSD08L110S05-C	8	7.6	110	60	58.5	S05	Cylindrical	Carbide
VSSD10L070S06-C	10	9.6	70	20	18.5	S06	Cylindrical	Carbide
VSSD10L075S06-S	10	9.6	75	20	17.5	S06	Cylindrical	Steel
VSSD10L090S06-C	10	9.6	90	40	38.5	S06	Cylindrical	Carbide
VSSD10L110S06-C	10	9.6	110	60	58.5	S06	Cylindrical	Carbide
VSSD10L150S06-C	10	9.6	150	100	98.5	S06	Cylindrical	Carbide
VSSD12L070S08-C	12	11.5	70	20	17	S08	Cylindrical	Carbide
VSSD12L090S08-C	12	11.5	90	40	38	S08	Cylindrical	Carbide
VSSD12L090S08-S	12	11.5	90	16	13.5	S08	Cylindrical	Steel
VSSD12L110S08-C	12	11.5	110	60	58	S08	Cylindrical	Carbide
VSSD12L130S08-C	12	11.5	130	80	78	S08	Cylindrical	Carbide
VSSD16L090S10-C	16	15.2	90	40	38	S10	Cylindrical	Carbide
VSSD16L100S10-S	16	15.2	100	20	18	S10	Cylindrical	Steel
VSSD16L110S10-C	16	15.2	110	60	58	S10	Cylindrical	Carbide
VSSD16L130S10-C	16	15.2	130	80	78	S10	Cylindrical	Carbide
VSSD16L150S10-C	16	15.2	150	100	98	S10	Cylindrical	Carbide
VSSD20L090S12-C	20	18.3	90	40	37	S12	Cylindrical	Carbide
VSSD20L120S12-S	20	18.3	120	25	20.5	S12	Cylindrical	Steel
VSSD20L130S12-C	20	18.3	130	80	77	S12	Cylindrical	Carbide
VSSD20L200S12-C	20	18.3	200	120	117	S12	Cylindrical	Carbide
VSSD25L120S15-C	25	23.9	120	60	58	S15	Cylindrical	Carbide
VSSD25L135S15-S	25	23.9	135	35	33	S15	Cylindrical	Steel
VSSD25L170S15-C	25	23.9	170	100	98	S15	Cylindrical	Carbide
VSSD25L250S15-C	25	23.9	250	150	148	S15	Cylindrical	Carbide

Weldon shank + straight neck (TungMeister)

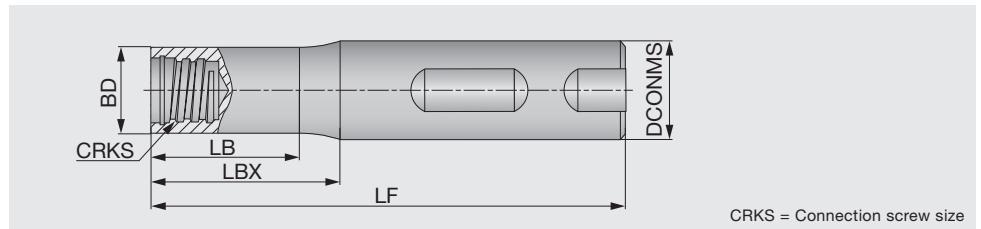

Designation	DCONMS	BD	LF	LBX	LB	CRKS	Shank shape	Shank material
VSSD12L055W05-S	12	7.6	55	3.8	-	S05	Weldon	Steel
VSSD16L065W06-S	16	9.6	65	6	-	S06	Weldon	Steel
VSSD16L065W08-S	16	11.5	65	4	-	S08	Weldon	Steel
VSSD20L070W10-S	20	15.2	70	4	-	S10	Weldon	Steel
VSSD25L075W12-S	25	18.3	75	6	-	S12	Weldon	Steel

Cylindrical shank + tapered neck (TungMeister)

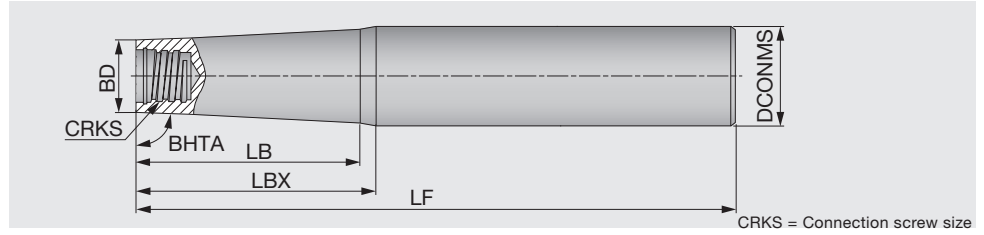


Designation	BHTA	DCONMS	BD	LF	LBX	LB	CRKS	Shank shape	Shank material
VTSD12L080S05-S	85°	12	7.6	80	25	-	S05	Cylindrical	Steel
VTSD12L100S05-S	89°	12	7.6	100	35	29	S05	Cylindrical	Steel
VTSD12L110S05-C	89°	12	7.6	110	60	56	S05	Cylindrical	Carbide
VTSD12L130S05-C	89°	12	7.6	130	80	77	S05	Cylindrical	Carbide
VTSD16L125S06-S	85°	16	9.6	125	34	31	S06	Cylindrical	Steel
VTSD16L130S08-C	89°	16	11.5	130	80	76.5	S08	Cylindrical	Carbide
VTSD16L140S08-S	85°	16	11.5	140	22	19	S08	Cylindrical	Steel
VTSD16L150S05-C	89°	16	7.6	150	100	91	S05	Cylindrical	Carbide
VTSD16L150S06-C	89°	16	9.6	150	100	94.5	S06	Cylindrical	Carbide
VTSD16L150S08-C	89°	16	11.5	150	100	98	S08	Cylindrical	Carbide
VTSD16L160S06-S	89°	16	9.6	160	55	46.5	S06	Cylindrical	Steel
VTSD16L170S06-C	89°	16	9.6	170	120	116.5	S06	Cylindrical	Carbide
VTSD20L140S10-S	85°	20	15.2	140	27.5	-	S10	Cylindrical	Steel
VTSD20L170S08-C	89°	20	11.5	170	120	112	S08	Cylindrical	Carbide
VTSD20L170S08-S	89°	20	11.5	170	80	69.5	S08	Cylindrical	Steel
VTSD20L170S10-C	89°	20	15.2	170	120	119	S10	Cylindrical	Carbide
VTSD20L190S10-C	89°	20	15.2	190	140	-	S10	Cylindrical	Carbide
VTSD20L190S10-S	89°	20	15.2	190	80	73	S10	Cylindrical	Steel
VTSD20L210S10-C	89°	20	15.2	210	160	-	S10	Cylindrical	Carbide
VTSD25L160S12-S	85°	25	18.3	160	40	-	S12	Cylindrical	Steel
VTSD25L170S10-S	85°	25	15.2	170	56	-	S10	Cylindrical	Steel
VTSD25L180S12-C	89°	25	18.3	180	120	115	S12	Cylindrical	Carbide
VTSD25L210S12-S	89°	25	18.3	210	100	94.5	S12	Cylindrical	Steel
VTSD25L250S12-C	89°	25	18.3	250	140	136.5	S12	Cylindrical	Carbide
VTSD32L155S15-S	85°	32	23.9	155	45	-	S15	Cylindrical	Steel
VTSD32L190S12-S	85°	32	18.3	190	80	-	S12	Cylindrical	Steel
VTSD32L220S15-S	85°	32	23.9	220	100	-	S15	Cylindrical	Steel
VTSD32L250S15-C	89°	32	23.9	250	150	145	S15	Cylindrical	Carbide
VTSD32L300S15-C	89°	32	23.9	300	200	198	S15	Cylindrical	Carbide

TUNGMEISTER


VTSD**-W-A

Cylindrical shank + tapered neck, with coolant hole (TungMeister)

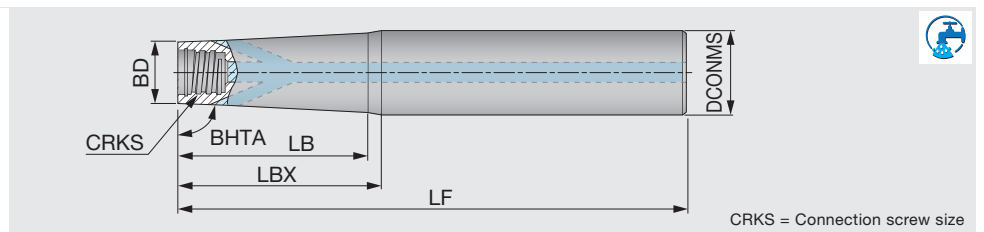

Designation	BHTA	DCONMS	BD	LF	LBX	LB	CRKS	Shank shape	Shank material
VTSD12L110S06-W-A	89°	12	9.6	110	60	59	S06	Cylindrical	Tungsten
VTSD16L170S06-W-A	89°	16	9.6	170	120	116	S06	Cylindrical	Tungsten

Cylindrical shank for VST slotting heads (TungMeister)

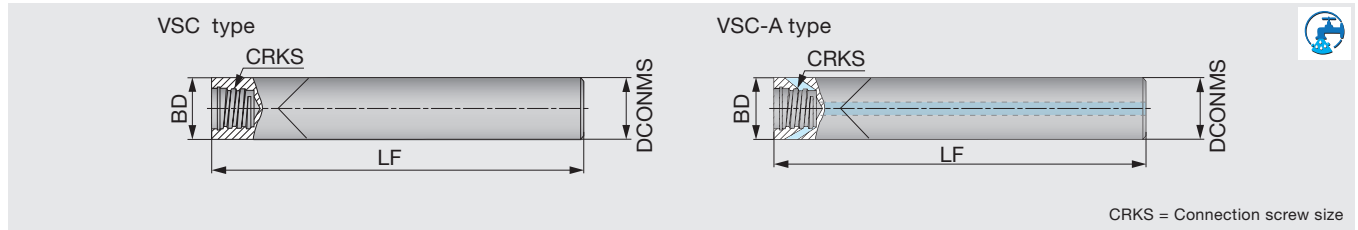


CRKS = Connection screw size

Designation	DCONMS	BD	LF	CRKS	Coolant hole	Shank shape	Shank material
VSC100L100S06-C	10	10	100	S06	Without	Cylindrical	Carbide
VSC120L100S08-C-A	12	12	100	S08	With	Cylindrical	Carbide

VSC shank should be used with VST slotting head.

If other types of heads are used, please be sure not to exceed the maximum depth of cut for each head (See ap for each head).
VSC shank does not have external clearance, and it may interfere with the workpiece during machining.

Cylindrical shank for VTB slotting head (TungMeister)

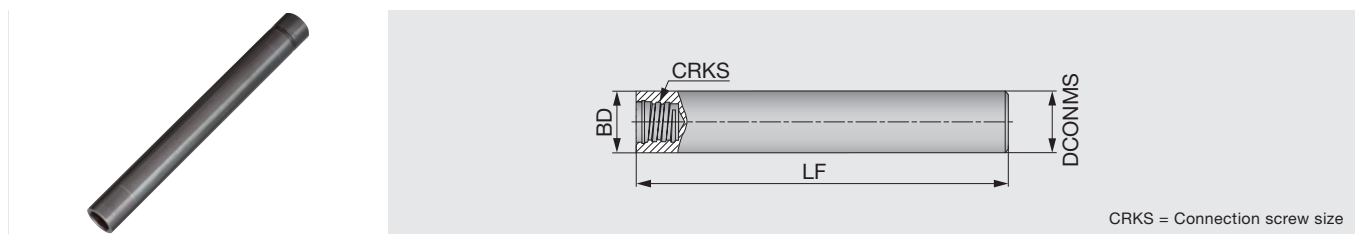


CRKS = Connection screw size

Designation	DCONMS	BD	LF	CRKS	Shank shape	Shank material
VSTD08L070S05-S	8	8	70	S05	Cylindrical	Steel
VSTD10L080S06-S	10	10	80	S06	Cylindrical	Steel
VSTD12L090S08-S	12	12	90	S08	Cylindrical	Steel
VSTD16L100S10-S	16	16	100	S10	Cylindrical	Steel

VSTD shank should be used with VTB slotting head.

If other types of heads are used, please be sure not to exceed the maximum depth of cut for each head (See ap for each head).
VSTD shank does not have external clearance, and it may interfere with the workpiece during machining.


Adapter for TungFlex conversion

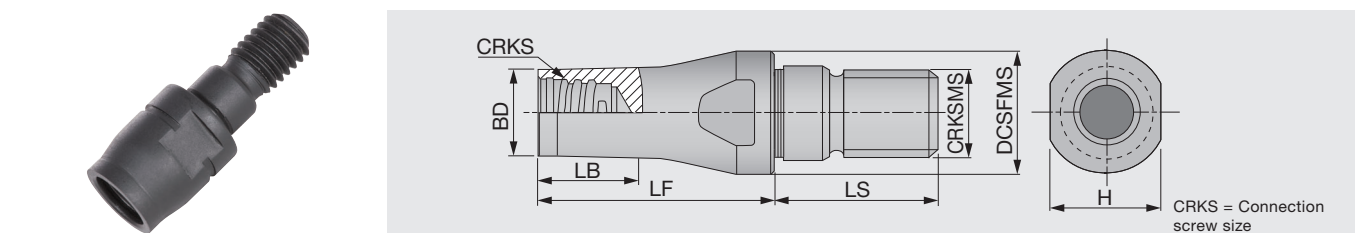

CRKS = Connection screw size

Designation	BD	DCSFMS	LF	LS	LB	CRKS	CRKSMS	H
VAD130L016S08-S-M8	11.7	13	16	17.5	6	S08	M8	11
VAD130L025S08-S-M8	11.7	13	25	17.5	20	S08	M8	11
VAD180L020S08-S-M10	11.7	18	20	20	12	S08	M10	13
VAD180L025S08-S-M10	11.7	18	25	20	15	S08	M10	11
VAD210L020S08-S-M12	11.7	21	20	20	10	S08	M12	12.75
VAD210L025S08-S-M12	11.7	21	25	20	13	S08	M12	12.75

Adapter for ER collect chucks

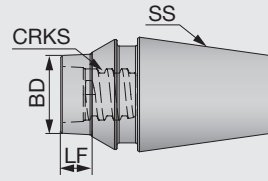

CRKS = Connection screw size




Designation	SS	BD	LF	CRKS
VER11CL006S05-S	ER11	7.92	6	S05
VER11CL020S05-S	ER11	7.92	20	S05
VER16CL012S05-S	ER16	7.92	12	S05
VER16CL020S05-S	ER16	7.92	20	S05
VER16CL010S06-S	ER16	9.92	10	S06
VER16CL020S06-S	ER16	9.92	20	S06
VER16CL006S08-S	ER16	11.6	6	S08
VER16CL020S08-S	ER16	11.6	20	S08

TORQUE WRENCHES

Appearance	Designation	Stock	Connection screw size	TM Head description	Torque (N·m)
Handle 	TORQUEWRENCH5-50NM9x12	●	-	-	-
Open wrenches for cylindrical heads 	TM-WRENCH-6-05	●	S05	VED, VEE VEE-I, VEE-R VEE-C, VEE-A VRD, VBD-BG VBE-BGA VDP, VCA	7
	TM-WRENCH-8-06	●	S06		10
	TM-WRENCH-10-08	●	S08		15
	TM-WRENCH-13-10	●	S10		28
	TM-WRENCH-16-12	●	S12		28
	TM-WRENCH-20-15	●	S15		40
Open wrenches for 2 flute heads 	TM-WRENCH-4E-05	●	S05	VRB, VRC VFX, VBB-BM VBB-BG VBB-SG VCP, VGC VCW, VCR	7
	TM-WRENCH-5E-06	●	S06		10
	TM-WRENCH-7E-08	●	S08		15
	TM-WRENCH-8E-10	●	S10		28
	TM-WRENCH-9E-12	●	S12		28
90° adaptor for Torx bits 	INSERT-TOOL-9X12MM	●	-	-	-
Torx bits sockets 	BIT-SOCKET-T20-DRIVE	●	S05, S06	VTB135 VTB160W2.00 VTB165W2.00	7, 10
	BIT-SOCKET-T25-DRIVE	●	S06	VTB160W3.00 VTB160W4.00	10
	BIT-SOCKET-T30-DRIVE	●	S08	VTB165W3.00	15
	BIT-SOCKET-T40-DRIVE	●	S08, S10	VTB165W4.00 VTB195	15, 28
	BIT-SOCKET-T50-DRIVE	●	S08, S10	VST277 VTB225 VTB250	15, 28

WRENCH


KEYV-..., KEYV-S..., KEYV-T..., KEYV-T**L, KEYV-W20

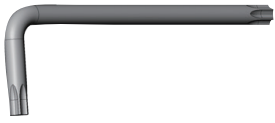Appearance	Designation	Connection screw size	Torque (N·m)	Applicable head
	KEYV-S05	S05	7	Square Ball Radius Drilling Chamfering Counter boring
	KEYV-S06	S06	10	
	KEYV-S08	S08	15	
	KEYV-S10	S10	28	
	KEYV-S12	S12	28	
	KEYV-W20	S15	40	
	KEYV-177	S06	10	Slotting VST type
	KEYV-217	S08	15	
	KEYV-T40L	S08	15	Slotting VST, VTB type
		S10	28	
	KEYV-T20	S05	7	Slotting VTB type
		S06	10	
	KEYV-T25	S06	10	
	KEYV-T30L	S08	15	
	KEYV-T50L	S08	15	
		S10	28	

Note: Wrenches are sold separately.

CAUTIONARY POINTS IN USE

- The cutting heads specified by Tungaloy must be used. Avoid using alternate heads that are not Tungaloy products as this will damage the shank and can cause severe accident or injury.
- Before setting the head, clean the connection screw with an air blast or a wiping cloth to remove chips and other foreign matter that may remain.
- Do not apply the lubricant to the connection screw.
- Please use the correct "Wrench" with the correct cutting head. Tighten the head slowly until the face of the head contacts the shank. (Please refer to the picture shown on the right.) Do not re-tightening or over-tightening. Excessive tightening may cause the cutting head to break.
- Do not apply excessive force or a hammer when tightening or exchanging the cutting heads.

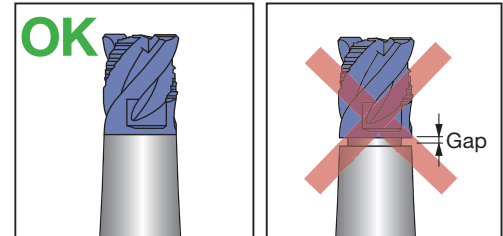

Grade
Insert
Toolholder
Ext. Toolholder
Int. Toolholder
Threading
Grooving
Miniature tool
Milling cutter
Endmill
Drilling tool
Tooling System
User's Guide
Index

A
B
C
D
E
F
G
H
I
J
K
L
M